

MODEL : TN-3000-112 OUTPUT:110V/60Hz

AC OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	RATED POWER (TYP)	3000W	I/P: 12VDC Ta:25°C	<u>3000</u> W	P
2	WAVEFORM	True sine wave (THD<3%)	I/P: 13VDC O/P: FULL LOAD Ta:25°C	FULL LOAD: <u>1.77</u> %	P
3	FREQUENCY	60HZ $\pm$ 0.1HZ	I/P: 12VDC O/P: FULL LOAD Ta:25°C	FULL LOAD: <u>59.98</u> HZ	P
4	AC REGULATION (TYP)	$\pm$ 3%	I/P: 12VDC O/P: FULL LOAD/NO LOAD Ta:25°C	1.2%	P
5	MAXIMUM OUTPUT POWER	(1)3450W/180sec. (2)4500w/10sec (3)SURGE POWER 6000W FOR 30CYCLE $V_{dc} \leq 13.5V$ SURGE POWER 6000W FOR 5 CYCLE FOR $V_{bat} > 13.5V_{dc}$	I/P: 12VDC O/P: TESTING LOAD Ta:25°C ※LED DISPLAY	(1) <u>3439W</u> /180 SEC (2) <u>4427W</u> /10 SEC (3) <u>5497W</u> /41 CYCLE FOR $\leq 13.5V_{DC}$ <u>5529.6W</u> /40 CYCLE FOR $> 14.5V_{DC}$	P
6	SAVING MODE TO NORMAL	$P_o > 7W \sim 15W$	I/P: 12VDC O/P: NO LOAD Ta:25°C ※LED DISPLAY	<u>10</u> W	P
7	NORMAL TO SAVING MODE(TYP)	$P_o \leq 5W$	I/P: 12VDC O/P: NO LOAD Ta:25°C ※LED DISPLAY	<u>4</u> W	P
8	TRANSFER TIME(TYP)	$t < 10$ mS inverter $\leftrightarrow$ by pass	I/P: 12VDC O/P: FULL LOAD Ta:25°C	INVERTER $\rightarrow$ BY PASS <u>9</u> ms BY PASS $\rightarrow$ INVERTER <u>10</u> ms	P

DC INPUT FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	DC CURRENT (TYP)	300A	I/P: 12VDC O/P: FULL LOAD Ta:25°C	<u>296</u> A	P
2	NO LOAD DISSIPATION(TYP)	$\leq 10W$ @standby saving mode	I/P: 12VDC O/P: NO LOAD Ta:25°C	<u>10</u> W/12VDC	P
3	OFF MODE DRAW CURRENT	$\leq 1mA$	I/P: 12VDC SW OFF O/P: NO LOAD Ta:25°C	<u>0.966mA</u> /12VDC	P

4	VOLTAGE RANGE (TYP)	10.5±0.5VDC~15±0.5VDC	I/P: TESTING O/P:NO LOAD/FULL LOAD Ta:25°C	$\frac{10.5}{10.8}$ VDC~ $\frac{14.7}{14.7}$ VDC/NO LOAD $\frac{10.8}{10.8}$ VDC~ $\frac{14.7}{14.7}$ VDC/FULL LOAD	P
5	EFFICIENCY(TYP)	88%	I/P: 13VDC O/P: Po=2100W Ta:25°C	88.13%	P

BATTERY INPUT PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	BAT LOW ALARM (INVERTER MODE)	10.8V~11.8VDC	I/P: TESTING O/P:FULL LOAD Ta:25°C ※LED DISPLAY	$\frac{11.6}{11.6}$ V	P
2	BAT LOW SHUT DOWN	10V~11VDC	I/P: TESTING O/P: FULL LOAD Ta:25°C ※LED DISPLAY	$\frac{10.9}{10.9}$ V Shut down Recovery	P
3	BAT. RECOVERY VOLTAGE	13.7VDC~14.7VDC	I/P: TESTING O/P:FULL LOAD Ta:25°C	14.3 V	P
4	TRANSFER TO AC BY PASS	10.5VDC ~11.5VDC	I/P: TESTING O/P: FULL LOAD Ta:25°C	11.3V	P
5	BY PASS TRANSFER TO INVERTER	13.7VDC~14.7VDC	I/P: TESTING O/P: FULL LOAD Ta:25°C	14.1V	P
6	OVER VOLTAGE	14.5V~15.5VDC	I/P: TESTING O/P:FULL LOAD Ta:25°C	14.7V	P

AC OUTPUT PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	OVER TEMPERATURE	SPEC : TSW1 : $90 \pm 5^{\circ}\text{C}$ O.T.P. NO DAMAGE	I/P: 12VDC O/P: FULL LOAD SET:SAVING MODE Ta:25°C ※LED DISPLAY	O.T.P. Active Shut down o/p voltage Re-power on to recover	P
2	SHORT PROTECTION	SHORT EVERY OUTPUT NO DAMAGE	I/P:14.6VDC O/P: FULL LOAD TEST: 3 TIMES Ta:25°C ※LED DISPLAY	NO DAMAGE Shut down o/p voltage Re-power on to recover	P
3	OVER LOAD (INVERTER)	105%~115%LOAD 180sec 115%~150%LOAD10 Sec Shutdown Re-power ON	I/P: 12VDC O/P: TESTING Ta:25°C ※LED DISPLAY	12VDC: $\frac{110}{140}$ % $\frac{180}{10}$ sec Shut down Re-power ON	P

FAN CONTROL FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	FAN SPEED CONTROL	-----	I/P: 12VDC O/P: FULL LOAD Ta:25°C	Fan Voltage= 12.45V	P
2	FAN LOCK	Shut down Re-power ON	I/P: 12VDC O/P: FULL LOAD Ta:25°C ※LED DISPLAY	Shut down Re-power ON	P

AC CHARGER

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	CHARGE CURRENT	25A±2A	I/P: 110VAC O/P:CV MODE=12V ACLOAD:FULL LOAD Ta:25°C	24.2A	P
2	CHARGE VOLTAGE	13.8VDC~14.8VDC	I/P: 110VAC O/P:NO LOAD ACLOAD:NO LOAD Ta:25°C	14.1V	P




SOLAR CHARGER

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	MAX O/PEN CIRCUIT VOLTAGE	25V /30A	I/P: DC SOURCE O/P:BATTERY Ta:25°C	25V / 30A	P
2	CHARGE VOLTAGE	13.8VDC~14.8VDC	I/P: DC SOURCE O/P:BATTERY Ta:25°C	14.1V	P




APPLICATION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	INDUCTION MOTOR	1HP	I/P: BATTERYVOLTAGE O/P:1HP Ta:25°C	INVERTER TURN ON/OFF :OK INDUCTION MOTOR ON/OFF:OK	P
2	SWITCHING POWER SUPPLY	RSP-1500-48*2PIC(Pin=3000W)	I/P:BATTERYVOLTAGE(190H52) O/P: RSP-3000*1PIC Ta:25°C	INVERTER TURN ON/OFF :OK INDUCTION MOTOR ON/OFF:OK	P

Load indicator test

Load indicator test							
LED INDICATOR	LOAD RANGE	RESULT	VERDICT	LED INDICATOR	LOAD RANGE	RESULT	VERDICT
	0W ~ 750W±150W	0W~775W	P		1500W±150W ~ 2250W±150W	1517W~2272W	P
	750W±150W ~ 1500W±150W	775W~1517W	P		2250W±150W ~ 3000W	2272W~3000W	P

Battery capacity indicator test

Battery capacity indicator test							
Inverter mode				By-pass mode			
LED INDICATOR	VOLTAGE RANGE	RESULT	VERDICT	LED INDICATOR	VOLTAGE RANGE	RESULT	VERDICT
	10.7V ~ 11.7V 2 LEDs→1 LED (11.2V)	11.3V	P		<12V (12.5V)	12.5V	P
	11.3V ~ 12.3V 3 LEDs→2 LEDs (11.8V)	11.81V	P		12.1V ~ 13.1V 1 LED→2 LEDs (12.6V)	12.8V	P
	11.4V ~ 12.4V 4 LEDs→3 LEDs (11.9V)	11.88V	P		12.7V ~ 13.7V 2 LEDs→3 LED (13.2V)	13.38V	P
	> 12.7V (12.2V)	12.13V	P		13.4V ~ 14.4V 3 LEDs→4 LEDs (13.9V)	14.1V	P

Battery low alarm test

Battery low alarm test					
O/PERATING MODE	VOLTAGE RANGE	LED INDICATOR	VOLTAGE RANGE	LED	VERDICT
Inverter mode	10.8V ~ 11.8V	 Bat Low Buzzer sounds	11.24V	OK	P
By-pass mode & Saving mode	12.1V ~ 13.1V	 Bat Low	12.56V	OK	P

Solar charger test

Solar charger test					
STATUS	VOLTAGE RANGE	LED INDICATOR	NOTE	VOLTAGE RANGE	VERDICT
ON	12.7V ~ 13.7V		Solar charging current > 3.5A ; LED ON Solar charging current < 1A ; LED OFF	<14.1V	P
OFF	13.8V ~14.8V		LED OFF	>14.1V	P

Saving mode test

NOTE : Both of load & battery indictors should be off under saving mode				
Saving mode test				
O/PERATING MODE	POWER LEVEL FOR TRANSITION	LED INDICATOR	P o	VERDICT
Saving mode → Normal mode	7W<Po<15W		10W	P
Normal mode → Saving mode	Po < 10W		8W	P

POWER ON AND MODE SETTING CODES:

1.O/Peration Mode Selection

O/PERATION MODE	LED INDICATORS	VERDICT
Energy Saving mode	RED ● YELLOW ★ GREEN ★	P
UPS mode	RED ○ YELLOW ★ GREEN ★	P

↓After pushing button 3 seconds and beeping

2.Voltage And Frequency Mode Selection

	100V (200V)	110V (220V)	115V (230V)	120V (240V)
50Hz	RED ● YELLOW ○ GREEN ○	RED ● YELLOW ○ GREEN ●	RED ● YELLOW ● GREEN ○	RED ● YELLOW ● GREEN ●
VERDICT	P	P	P	P




60Hz	RED ★ YELLOW ○ GREEN ○	RED ★ YELLOW ○ GREEN ●	RED ★ YELLOW ● GREEN ○	RED ★ YELLOW ● GREEN ●
VERDICT	P	P	P	P

↓After pushing button 3 seconds and beeping

3.Saving Mode Selection

Saving mode	LED INDICATOR	VERDICT
ENABLED	RED ★ YELLOW ★ GREEN ●	P
DISABLED	RED ★ YELLOW ★ GREEN ○	P

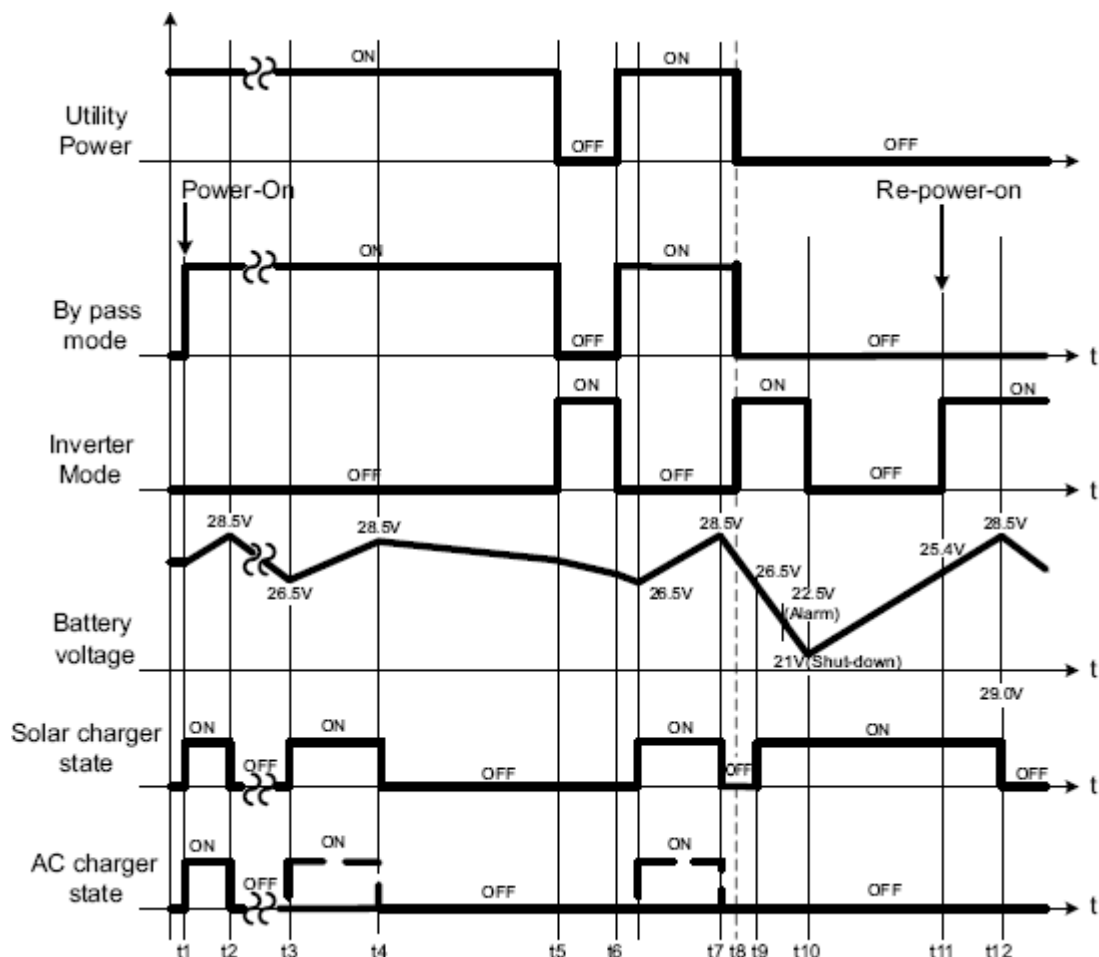
ERROR CODE LED INDICATOR

Error code								
LED INDICATOR	FAILURE MESSAGE	VERDICT	LED INDICATOR	FAILURE MESSAGE	VERDICT	LED INDICATOR	FAILURE MESSAGE	VERDICT
LOAD 	105% OLP	P	LOAD 	115% OLP	P	LOAD 	150% OLP	P
LOAD 	OTP	P	LOAD 	Inverter OVP Or Inverter UVP	P	LOAD 	AC output fail (O/P short)	P
LOAD 	Battery low shutdown	P	LOAD 	Battery bad or Battery notch	P	LOAD 	FAN -LOCK	P
LOAD 	Remote-off	P						

VOLTAGE RANGE OF AC UTILITY FOR O/PERATION MODE TRANSITION :

AC input high / low line limit				
AC MAINS	VOLTAGE LIMIT	VOLTAGE RANGE	RESULT	VERDICT
110V	High limit (To INV mode)	Vac > 127±4V	130	P
	Recovery to high (To AC mode)	Vac < 124±4V	123.6	P
	Low limit (To INV mode)	Vac < 90±4V	92.5	P
	Recovery to low (To AC mode)	Vac > 94±4V	94.1	P

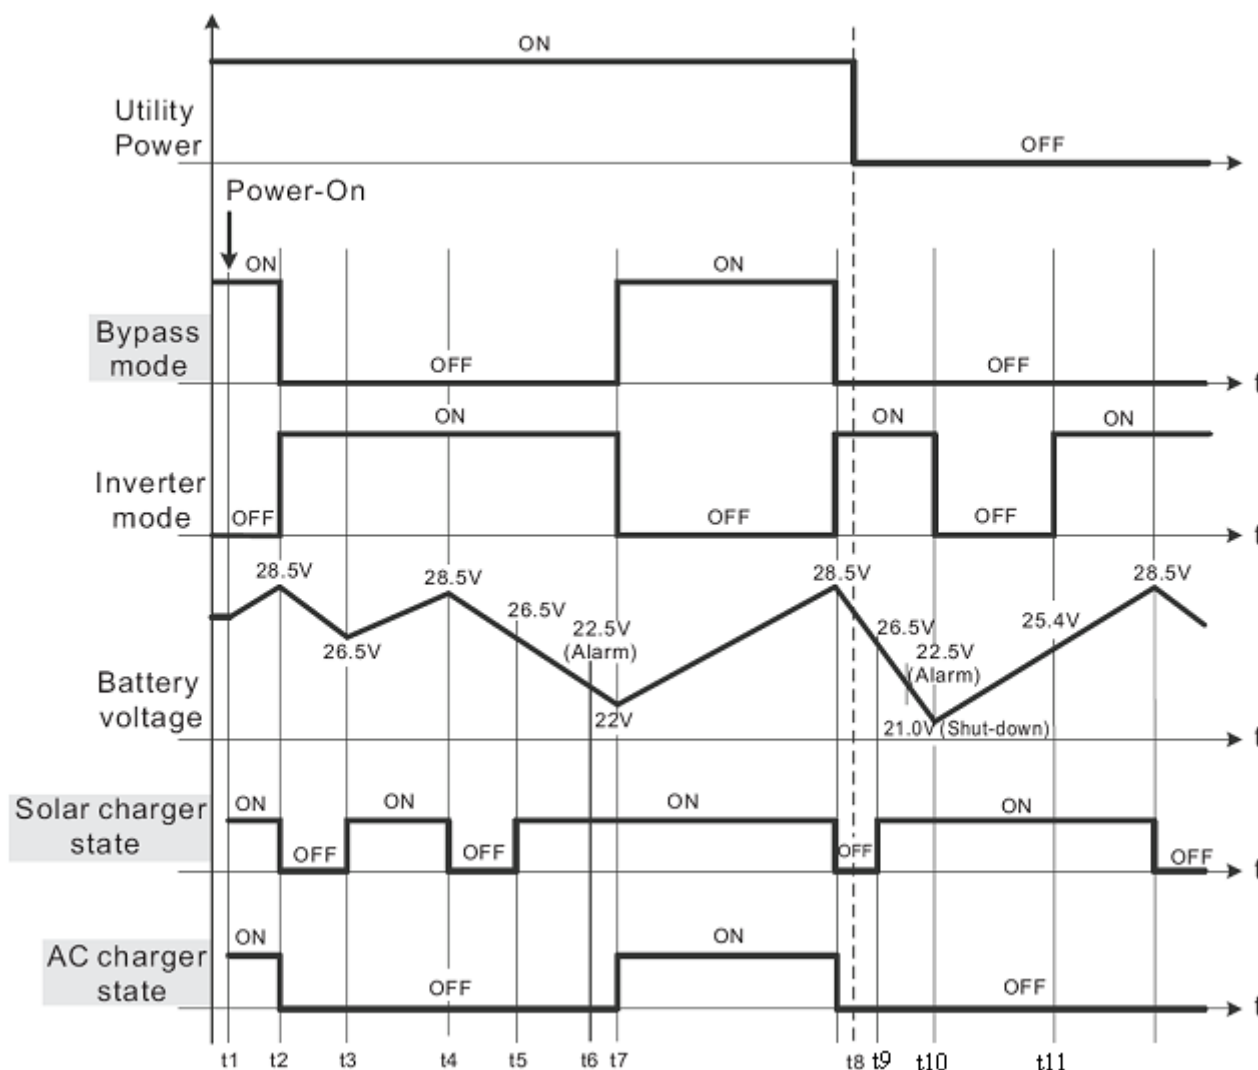
UPS MODE VERIFICATION



TIME SEQUENCE	TEST CONDITIONS	LED INDICATOR STATUS		VERDICT
t1	1、AC utility in → 110V/220V 2、Battery voltage → 12V/24V/48V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、 ☒ 2、 ☒ 3、 ☒ 4、 ☐ 5、 ☒	P
t2	1、AC utility in → 110V/220V 2、Battery voltage → 14.5V/29V/58V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、 ☒ 2、 ☐ 3、 ☐ 4、 ☐ 5、 ☒	P
t3	1、AC utility in → 110V/220V 2、Battery voltage → 13V/26V/52V	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER	1、 ☒ 2、 ☐ 3、 ☒ 4、 ☐	P

	3、Solar charging current → 3.5A	5、BY PASS	5、 	
t3'	1、AC utility in → 110V/220V 2、Battery voltage → 13V/26V/52V 3、Solar charging current → 0A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、  2、  3、  4、  5、 	P
t5	1、AC utility disconnected 2、Battery voltage → 14.5V/29V/58V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、  2、  3、  4、  5、 	P
t6	1、AC utility in → 110V/220V 2、Battery voltage → 14.5V/29V/58V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、  2、  3、  4、  5、 	P
t9	1、AC utility disconnected 2、Battery voltage → 13V/26V/52V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、  2、  3、  4、  5、 	P
t10	1、AC utility disconnected 2、Battery voltage → 10.5V/21V/42V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS ◎Inverter shuts down	1、  2、  3、  4、  5、  error0111	P
t11	1、AC utility disconnected 2、Battery voltage → 13V/26V/52V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS ◎Inverter resumes normal O/Peration	1、  2、  3、  4、  5、 	P

ESM MODE VERIFICATION



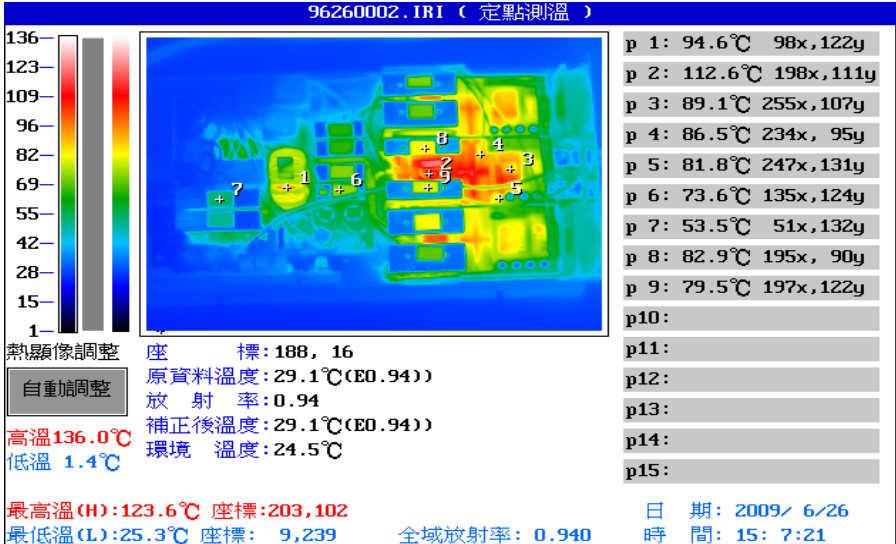
TIME SEQUENCE	TEST CONDITIONS	LED INDICATOR STATUS		VERDICT
t1	1 、 AC utility in → 110V/220V 2 、 Battery voltage → 12V/24V/48V 3 、 Solar charging current → 3.5A	1 、 AC IN 2 、 AC CHARGER 3 、 SOLAR CHARGER 4 、 INVERTER 5 、 BY PASS	1 、 ■ 2 、 ■ 3 、 ■ 4 、 □ 5 、 ■	P
t2	1 、 AC utility in → 110V/220V 2 、 Battery voltage → 14.5V/29V/58V 3 、 Solar charging current →	1 、 AC IN 2 、 AC CHARGER 3 、 SOLAR CHARGER 4 、 INVERTER	1 、 ■ 2 、 □ 3 、 □ 4 、 ■	P

	3.5A	5、BY PASS	5、 ☐	
t3	1、AC utility in → 110V/220V 2、Battery voltage → 13V/26V/52V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、 ☒ 2、 ☐ 3、 ☒ 4、 ☒ 5、 ☐	P
t4	1、AC utility in → 110V/220V 2、Battery voltage → 14.5V/29V/58V 3、Solar charging current → 0A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、 ☒ 2、 ☐ 3、 ☐ 4、 ☒ 5、 ☐	P
t7	1、AC utility in → 110V/220V 2、Battery voltage → 11V/22V/44V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、 ☒ 2、 ☐ 3、 ☒ 4、 ☐ 5、 ☒	P
t8	1、AC utility disconnected 2、Battery voltage → 14.5V/27V/54V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、 ☐ 2、 ☐ 3、 ☐ 4、 ☒ 5、 ☐	P
t9	1、AC utility disconnected 2、Battery voltage → 12V/24V/48V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS	1、 ☐ 2、 ☐ 3、 ☒ 4、 ☒ 5、 ☐	P
t10	1、AC utility disconnected 2、Battery voltage → 10.5V/21V/42V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS ◎Inverter shuts down.	1、 ☐ 2、 ☐ 3、 ☒ 4、 ☐ 5、 ☐ error0111	P
t11	1、AC utility disconnected 2、Battery voltage → 13V/26V/52V 3、Solar charging current → 3.5A	1、AC IN 2、AC CHARGER 3、SOLAR CHARGER 4、INVERTER 5、BY PASS ◎Inverter re-powers on to recover	1、 ☐ 2、 ☐ 3、 ☒ 4、 ☒ 5、 ☐	P

COMPONENT STRESS TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	DC TO DC Power Transistor (D to S) or (C to E) Peak Voltage	Q 310 Rated IXT160N075T 160A/75V	I/P:14.5VDC O/P: (1)Full Load Turn On (2) Output Short (3)Full load continue Ta:25℃	(1) 51.4 V (2) 47.4 V (3) 46 V	P
2	DC TO DC Diode Peak Voltage	D 400 Rated SF20LC30:300 V20 A	I/P:14.5VDC O/P: (1)Full Load Turn On (2) Output Short (3)Full load continue Ta:25℃	(1) 267 V (2) 262 V (3) 245 V	P
3	DC BUS Capacitor Voltage	C403 Rated 680u/250V/105℃ MXG	I/P:14.5VDC O/P: (1)Full Load Turn SW On /Off (2) Min load Turn SW On /Off (3)Full Load /Min load Change Ta:25℃	(1) 250 V (2) 250 V (3) 250 V	P
4	DC TO AC Power Transistor (D to S) or (C to E) Peak Voltage	Q 51 Rated IRGP50B60PD1pF 50A/600V	I/P:14.5VDC O/P: (1)Full Load Turn On (2) Output Short (3)Full load continue Ta:25℃	(1) 396 V (2) 492 V (3) 314 V	P
5	DC TO FAN Power Transistor (D to S) or (C to E) Peak Voltage	Q 100 Rated STP75NF75 80A/75V	I/P:14.5VDC O/P: (1)Full Load Turn On (2) Output Short (3)Full load continue Ta:25℃	(1) 54.4 V (2) 53 V (3) 48 V	P
6	DCTO FAN Diode Peak Voltage	D 200 Rated MBR20H100CT 20A/100V	I/P:14.5VDC O/P: (1)Full Load Turn On (2) Output Short (3)Full load continue Ta:25℃	(1) 80 V (2) 91 V (3) 77.6 V	P
7	FAN TO CPU Power Transistor (D to S) or (C to E) Peak Voltage	Q601 Rated STP75NF75 80A/75V	I/P:14.5VDC O/P: (1)Full Load Turn On (2) Output Short (3)Full load continue Ta:25℃	(1) 41.2 V (2) 50 V (3) 37 V	P
8	FAN TO CPU Diode Peak Voltage	D 630 Rated 21DQ10 2A/100V	I/P:14.5VDC O/P: (1)Full Load Turn On (2) Output Short (3)Full load continue Ta:25℃	(1) 58.6 V (2) 10 V (3) 55 V	P
9	AC CHARGE Power Transistor (D to S) or (C to E) Peak Voltage	Q701 2SK3878:900V9A	I/P110 VAC O/P: (1)Full Load Turn On (2)Full load continue Ta:25℃	(1) 600 V (2) 592 V	P
10	AC CHARGE OUPUTDIODE Peak Voltage	D800 FMEN-230A:100V30A	I/P110 VAC O/P: (1)Full Load Turn On (2) Output Short (3)Full load continue Ta:25℃	(1) 54 V (2) 54 V	P
11	SOLAR CHARGE Power Transistor (D to S) or (C to E) Peak Voltage	Q850 STP75NF75:75V/80A	I/P:45 VDC O/P: (1)Full Load Turn On (2)Full load continue Ta:25℃	(1) 27 V (2) 26 V	P

Reliability Test report

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1.	THERMO TRACER TEST (ROOM AMBIENT)	MODEL:TN-3000-112 TEST CONDITION:12VDC FULL LOAD TA=23.8℃		 96260002. IRI (定點測溫) 座 標: 188, 16 原資料溫度: 29.1℃(E0.94) 放 射 率: 0.94 補正後溫度: 29.1℃(E0.94) 環境 溫度: 24.5℃ 最高溫(H): 123.6℃ 座標: 203, 102 最低溫(L): 25.3℃ 座標: 9, 239 全域放射率: 0.940 日 期: 2009/ 6/26 時 間: 15: 7:21 p 1: 94.6℃ 98x, 122y p 2: 112.6℃ 198x, 111y p 3: 89.1℃ 255x, 107y p 4: 86.5℃ 234x, 95y p 5: 81.8℃ 247x, 131y p 6: 73.6℃ 135x, 124y p 7: 53.5℃ 51x, 132y p 8: 82.9℃ 195x, 90y p 9: 79.5℃ 197x, 122y p10: p11: p12: p13: p14: p15:	P
2	TEMPERATURE RISE TEST	MODEL : TN-3000-112 1. ROOM AMBIENT BURN-IN : 1 HRS I/P : 12VDC O/P : FULL LOAD Ta= 28.8 ℃ 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 12VDC O/P : FULL LOAD Ta= 41.4 ℃			P

		NO	Position	P/N	ROOM AMBIENT Ta= 28.8 °C	HIGH AMBIENT Ta= 41.4 °C		
		1	C333	2200u/16V L10Kh 12.5*25 YXG	44.5°C	54.5°C		
		2	L330	TF1966	61.4°C	72.0°C		
		3	C337	C/MPP 755/250V 5% P=32.5 MPE	46.5°C	56.3°C		
		4	T330 COIL	TF-2001	61.0°C	71.6°C		
		5	T330 CORE	TF-2001	67.8°C	78.0°C		
		6	Q337	FET IXTP160N075T 160A/75V TO220	68.0°C	80.1°C		
		7	Q350	FET IXT160N075T 160A/75V TO220	61.9°C	72.7°C		
		8	D330	HER305 3A/400V	61.8°C	72.9°C		
		9	D350	HER305 3A/400V	67.7°C	78.6°C		
		10	D409	SF20LC30 20A/300V	71.6°C	82.3°C		
		11	C403	680u/250V 105°C 25*50 MXR	64.9°C	75.8°C		
		12	L13	TR906	81.6°C	92.6°C		
		13	L1	TR908	84.1°C	96.2°C		
		14	C7	C/MPP 306/250V 5% P=45 BX+CP	62.4°C	73.2°C		
		15	U4	CURRENT ACS756ECA-100-PFF CA	47.9°C	58.5°C		
		16	Q70	IGBT IRGP50B60PD1pbF 50A/600V	81.5°C	93.1°C		
		17	Q71	IGBT IRGP50B60PD1pbF 50A/600V	82.3°C	93.5°C		
		18	RTH2	10KΩ 1% NA1033F12D5	74.3°C	84.8°C		
		19	C320	33u/50V UL10Kh 6.3*11 YXM	51.1°C	63.3°C		
		20	U310	DRIVER IC MCP1403-E/SN(Tap.) 8-SOIC	61.8°C	74.4°C		
		21	T100 COIL	TF1969	56.3°C	68.2°C		
		22	Q200	STD17NF03L-1 17A/30V Ipak	50.4°C	62.3°C		
		23	U100	PWM TL3845P	60.6°C	72.1°C		
		24	Q100	STP75NF75 80A/75V	61.6°C	74.0°C		
		25	D200	MBR20H100CT 20A/100V	52.9°C	64.3°C		
		26	U703	PHOTO KPC6N137	42.1°C	54.6°C		
		27	RG701	LM317T 1.5A	59.0°C	71.1°C		
		28	Q601	STP75NF75 80A/75V	43.2°C	55.9°C		
		29	RG602	RG L7805CV 1.0A/5V TO220	39.3°C	51.6°C		
		30	T601 COIL	TF2167	46.3°C	58.5°C		
		31	BD700	30A/800V US30KB80R	31.2°C	41.3°C		
		32	Q700	2SK4108 20A/500V	33.6°C	43.7°C		
		33	Q701	FET 2SK3878 9A/900V TO3P	34.5°C	45.0°C		
		34	D800	FMEN-230A 30A/100V	33.8°C	43.4°C		
		35	T700	TF883-R5	33.0°C	42.6°C		
		36	Q850	STP75NF75 80A/75V	31.2°C	44.4°C		
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 12VDC O/P : 100 % LOAD Ta= 0 °C	TEST : OK		P	

4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40 °C NO DAMAGE	I/P : 14.5VDC O/P : FULL LOAD Ta= 40 °C HUMIDITY= 95 %R.H	TEST : OK	P
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C ~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		TEST : OK	P
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -5°C ~ +45°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 12VDC/Full Load		TEST : OK	P
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK	P
8	CAPACITOR LIFE CYCLE	SUPPOSE C 333 IS THE MOST CRITICAL COMPONENT (1) I/P : 12VDC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 12VDC O/P : FULL LOAD Ta= 40 °C LIFE TIME		(1) 517337.4 HRS (2) 219000 HRS	P

SAFETY TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	BAT I/P-AC I/P: 3 KVAC/min BAT I/P-ACO/P: 3 KVAC/min AC O/P-FG: 1.5 KVAC/min	BAT I/P-AC I/P: 3.6 KVAC/min BAT I/P-ACO/P: 3.6 KVAC/min AC O/P-FG: 1.8 KVAC/min Ta:25°C	BAT I/P-AC I/P: 9.31mA BAT I/P-ACO/P: 9.31mA AC O/P-FG: 5.67 mA NO DAMAGE	P
2	ISOLATION RESISTANCE	BAT I/P-AC I/P: 500VDC>100MΩ BAT I/P-AC O/P: 500VDC>100MΩ AC O/P-FG: 500VDC>100MΩ	BAT I/P-AC I/P: 500 VDC BAT I/P-ACO/P: 500 VDC AC O/P-FG: 500 VDC Ta:25°C	BAT I/P-AC I/P: 10GΩ BAT I/P-AC O/P: 10GΩ AC O/P-FG: 8.4GΩ NO DAMAGE	P
3	GROUNDING CONTINUITY	EN 60950 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta:25°C	11mΩ	P
4	APPROVAL	TUV : Certificate NO : UL : File NO :			N/A

E.M.C TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	CONDUCTION	FCC CLASS A	I/P: 12 VDC O/P: FULL/50% LOAD Ta:25°C	CRITERIA A	P
2	RADIATION	FCC CLASS A	I/P: 12 VDC O/P: :FULL/50% LOAD Ta:25°C	CRITERIA A	P



DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2010/4/2	RD SAMPLE	PASS	SANFORD SU	VINCENT TSENG
2010/8/4	PRODUCT SAMPLE	PASS	SANFORD SU	VINCENT TSENG

2003/12/12 A50-F023