



Test Report: XDR-960-48

240W AC/DC High-End Ultra Slim Industrial DIN Rail
Power

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test



E.M.C. Test


■ RELIABILITY TEST

ENVIRONMENT TEST



DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

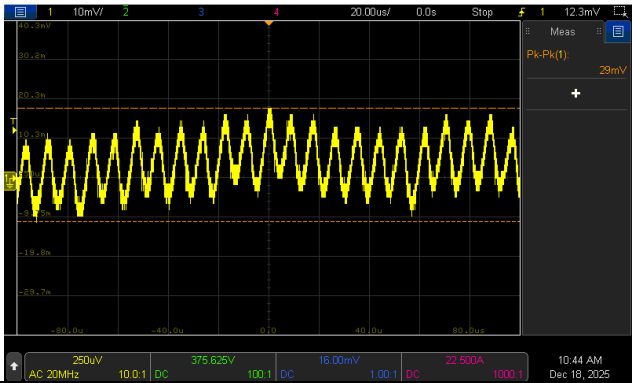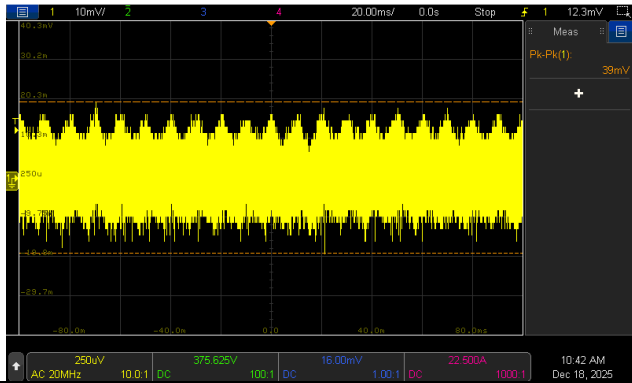NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 48V~55V	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	46.36V~57.34V/277VAC 46.35V~57.34V/230VAC 46.35V~57.34V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ +1%	I/P: 85VAC~305VAC O/P:FULL~MIN. LOAD Ta:25°C	V1: -0.013% ~ 0.027%
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 85VAC~ 305VAC O/P:FULL LOAD Ta:25°C	V1: -0.01% ~ 0%
4	LOAD REGULATION	V1: -1% ~ +1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.013% ~ 0.027%
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD / NO LOAD/ PEAK LOAD Ta:25°C	0.56%
6	RIPPLE & NOISE (Max)	V1: 150mVp-p 225mVp-p/PEAK LOAD	I/P:230VAC O/P:FULL LOAD Ta:25°C	29mVp-p / high frequency 39mVp-p / low frequency
high frequency :  low frequency : 				
7	SET UP TIME(Max)	230VAC/1500ms 115VAC/3000ms	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/ 991.8ms 230VAC/ 1011.2ms 115VAC/ 1065.6ms
INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage			INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage	

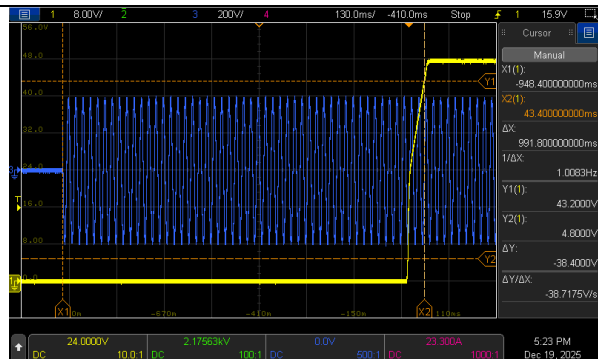


INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage CH3: AC Input Voltage

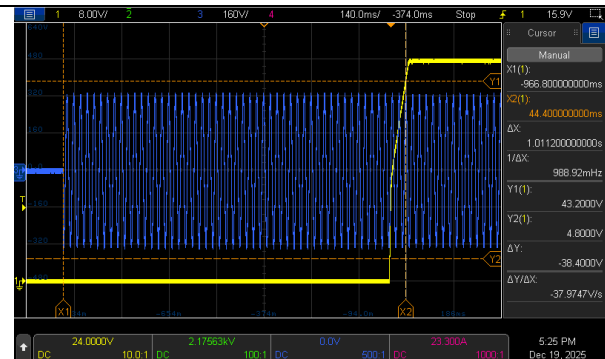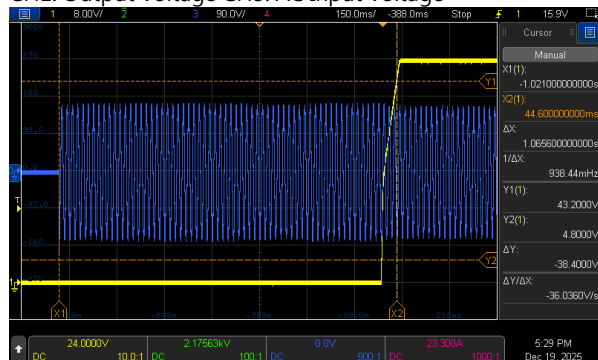


INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage
CH3: AC Input Voltage





INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage

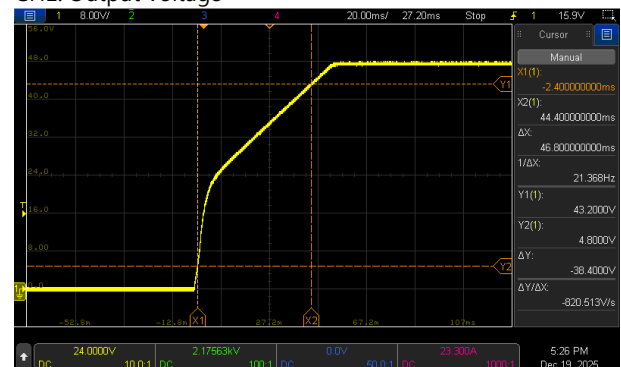






INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage

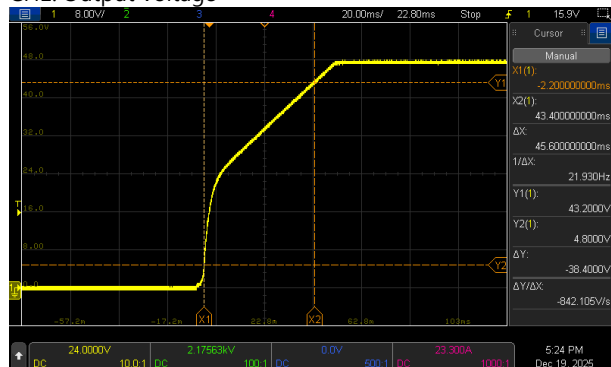



INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage

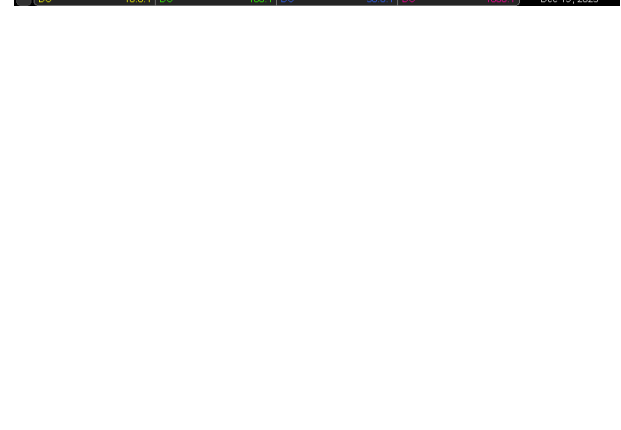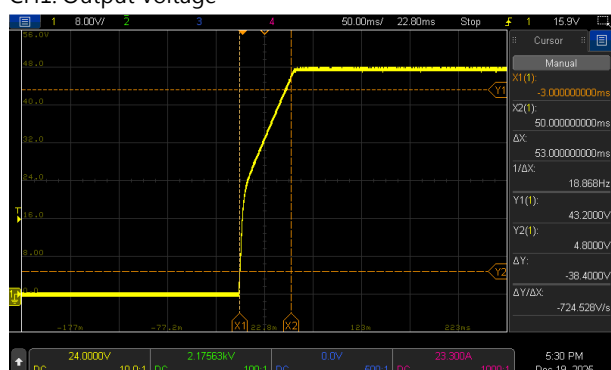


INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage

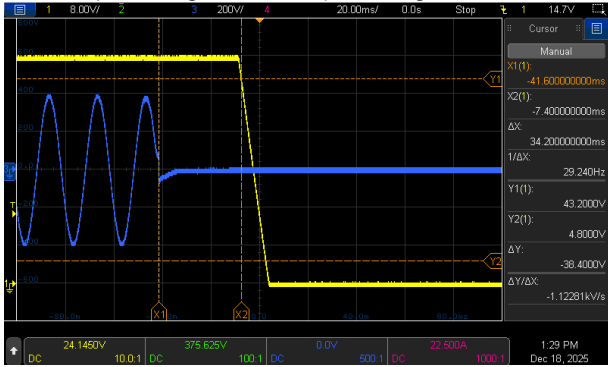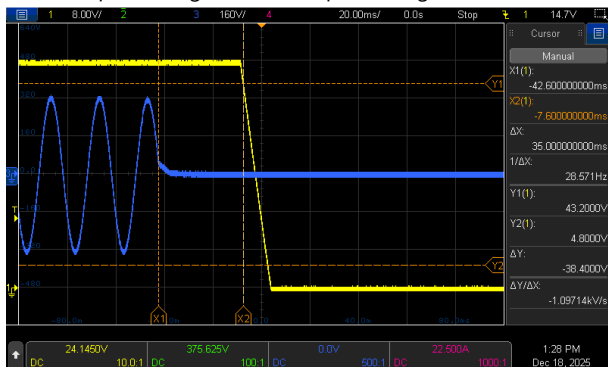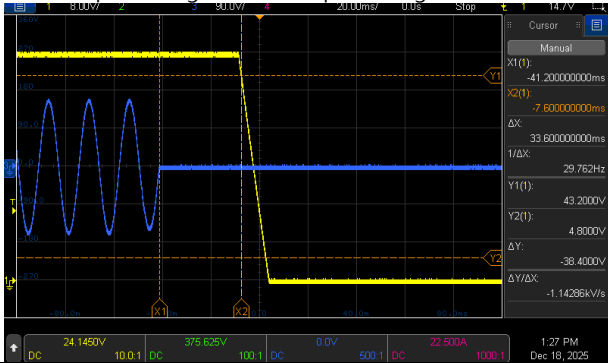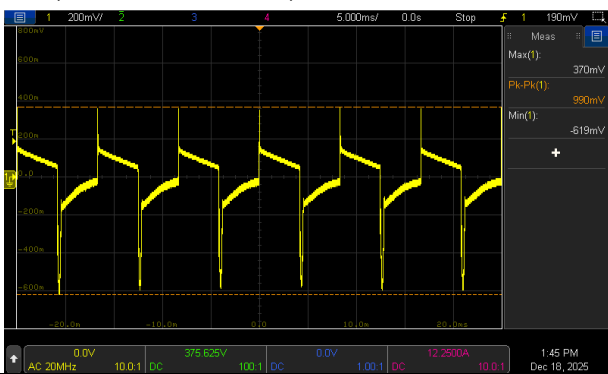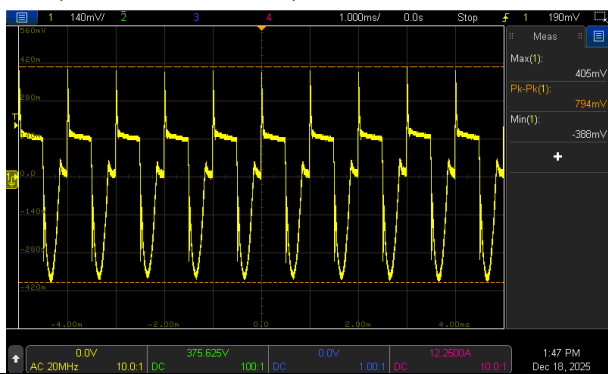9	HOLD UP TIME (Typ.)	230VAC/15ms 115VAC/15ms	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/ 34.2ms 230VAC/ 35ms 115VAC/ 33.6ms
INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage  INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage  INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 				
10	DYNAMIC LOAD	V1: 4800mVp-p	I/P: 230VAC O/P: (1) FULL/ MIN LOAD 50%DUTY / 120HZ (2) FULL/ MIN LOAD 50%DUTY / 1KHZ Ta:25°C	990mVp-p 794mVp-p
FULL / MIN LOAD 50%DUTY / 120HZ  FULL / MIN LOAD 50%DUTY / 1KHZ 				
11	TRANSIENT RECOVERY TIME	V1: 4800mVp-p <500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	399mVp-p


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT												
1	INPUT VOLTAGE RANGE	85VAC~305VAC 80VDC~ 431VDC  	(1) I/P: TESTING O/P: FULL / 85% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 85% LOAD/ 50% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 85% LOAD/ 50% LOAD Ta:25°C	(1) 81.8V~305V/ FULL LOAD 80.6V~305V/ 85% LOAD (2) 78.6Vdc~431Vdc/FULL LOAD 78.6Vdc~431Vdc/85% LOAD 78.6Vdc~431Vdc/50% LOAD (3) 78.6Vdc~431Vdc/FULL LOAD 78.6Vdc~431Vdc/85% LOAD 78.6Vdc~431Vdc/50% LOAD												
		I/P: HIGH-LINE+10V=315V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK													
		Derating 50% Load @80VDC	I/P: 80VDC O/P: 50% Load	TEST : OK												
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 85VAC~ 305VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK												
3	INPUT CURRENT (Typ.)	277V/ 4A 230V/ 5A 115V/ 9.5A	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =3.85A/ 277VAC I =4.505A/ 230VAC I =9.24A/ 115VAC												
4	LEAKAGE CURRENT	< 3.5mA@240Vac < 4.5mA@277Vac	I/P : 240VAC/60HZ I/P : 277VAC/60HZ O/P : Min LOAD Ta : 25°C	1.419mA@240Vac 1.659mA@277Vac												
5	NO LOAD CONSUMPTION	Remote Power OFF: 1.5W@115Vac & 230Vac &277 Vac Remote Power ON: 6.7W@115Vac 4.5W@277 Vac & 230Vac	I/P : 115VAC I/P : 230VAC I/P : 277VAC O/P : NO LOAD Ta : 25°C	TEST: <table><tr><td></td><td>Remote Power OFF</td><td>Remote Power ON</td></tr><tr><td>115VAC</td><td>0.685W</td><td>5.593W</td></tr><tr><td>230VAC</td><td>1.057W</td><td>3.121W</td></tr><tr><td>277VAC</td><td>1.204W</td><td>3.040W</td></tr></table>		Remote Power OFF	Remote Power ON	115VAC	0.685W	5.593W	230VAC	1.057W	3.121W	277VAC	1.204W	3.040W
	Remote Power OFF	Remote Power ON														
115VAC	0.685W	5.593W														
230VAC	1.057W	3.121W														
277VAC	1.204W	3.040W														
6	POWER FACTOR (Typ.)	>0.9/277VAC >0.95/ 230VAC >0.98/115VAC	I/P : 277VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9385/277VAC PF=0.9709/230VAC PF=0.9974/115VAC												
	P.F vs LOAD															

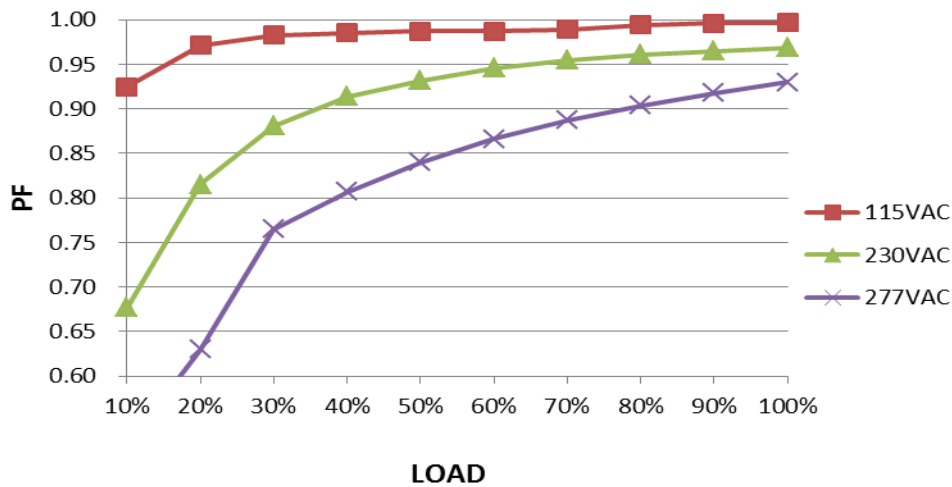

7	EFFICIENCY(Typ.)	96%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	96.5%
---	------------------	-----	---	-------

EFFICIENCY vs LOAD

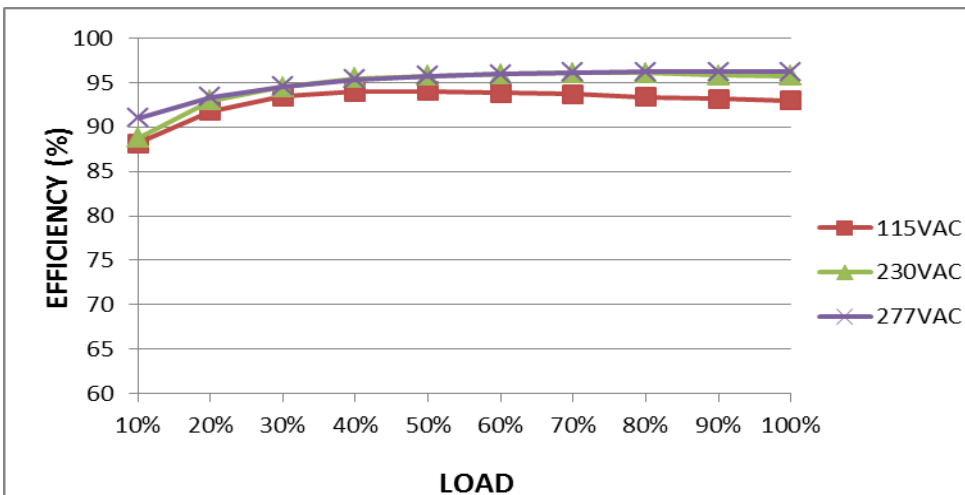

8	INRUSH CURRENT(Typ.)	277V/15A 230V/10A 115V/23A COLD START	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I = 9.8A / 277VAC I = 8.81A / 230VAC I = 4.27A / 115VAC T50=2786.6us/230V
---	----------------------	--	---	--

INPUT=277VAC/50HZ @ FULL LOAD

CH1: AC Input Voltage CH4: Input current



INPUT=230VAC/50HZ @ FULL LOAD


CH1: AC Input Voltage CH4: Input current



INPUT=115VAC/ 60HZ @ FULL LOAD
CH1: AC Input Voltage CH4: Input current




T50@230VAC :


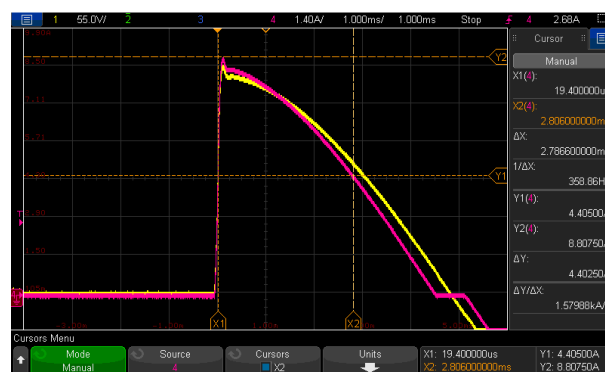


PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	Protection type: 105%~200% rated output power for more than 5 sec then constant current limiting at rate current without shutdown when Vo=30%~100% Hiccup mode when Vo<30% rated voltage	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	130%/305VAC 130%/230VAC 130%/100VAC Protection type: 105%~200% rated output power for more than 5 sec then constant current limiting at rate current without shutdown when Vo=30%~100% ; Hiccup mode when Vo<30% rated voltage
2	OVER VOLTAGE PROTECTION	57V~66V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 305VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	59.8V/ 305VAC 60.2V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active Protection type :OK Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode when Vo<30% rated voltage , recovers automatically after fault condition is removed	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD	NO DAMAGE PROTECTION TYPE : OK Hiccup mode when Vo<30% rated voltage , recovers automatically after fault condition is removed
5	Protection against Inverse Voltages from the Load	Prevent PSU damage from Back Electro magnetic Force during deceleration of motor or inductive load	I/P: 230VAC O/P: TESTING Ta:25°C	TEST : <u>OK</u>

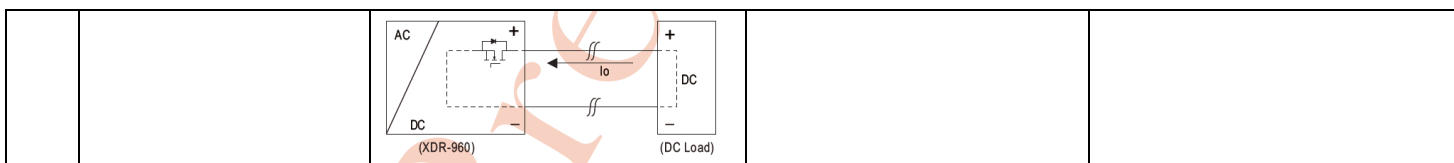

CONTROL FUNCTION TEST

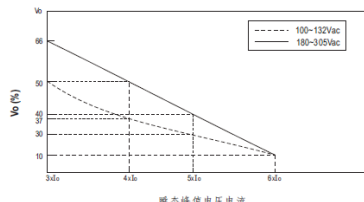NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																								
1	DC OK CONTACT RATINGS	30VDC/1A , 30VAC/0.5A RESISTIVE LOAD	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>																																								
2	REMOTE CONTROL	Power ON: Pin9 and Pin10 Short or keep 4~5Vdc Power OFF: Pin9 and Pin10 Open or keep < 0.5Vdc	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>																																								
3	PULSE CURRENT CAPABILTY	 <table><thead><tr><th>负载</th><th>100~132Vac Vo(%)</th><th>180~305Vac Vo(%)</th><th>时间 (Max.)</th></tr></thead><tbody><tr><td>3xIo</td><td>50</td><td>66</td><td>100ms</td></tr><tr><td>4xIo</td><td>37</td><td>50</td><td>70ms</td></tr><tr><td>5xIo</td><td>30</td><td>40</td><td>40ms</td></tr><tr><td>6xIo</td><td>10</td><td>10</td><td>15ms</td></tr></tbody></table>	负载	100~132Vac Vo(%)	180~305Vac Vo(%)	时间 (Max.)	3xIo	50	66	100ms	4xIo	37	50	70ms	5xIo	30	40	40ms	6xIo	10	10	15ms	I/P: 180VAC I/P: 100VAC O/P: TESTING Ta:25°C	180VAC : <table><thead><tr><th>Load</th><th>Iout_Time(ms)</th></tr></thead><tbody><tr><td>3xIo</td><td>115.2</td></tr><tr><td>4xIo</td><td>83.4</td></tr><tr><td>5xIo</td><td>52.6</td></tr><tr><td>6xIo</td><td>27.8</td></tr></tbody></table> 100VAC : <table><thead><tr><th>Load</th><th>Iout_Time(ms)</th></tr></thead><tbody><tr><td>3xIo</td><td>114</td></tr><tr><td>4xIo</td><td>83.2</td></tr><tr><td>5xIo</td><td>52.8</td></tr><tr><td>6xIo</td><td>28.2</td></tr></tbody></table>	Load	Iout_Time(ms)	3xIo	115.2	4xIo	83.4	5xIo	52.6	6xIo	27.8	Load	Iout_Time(ms)	3xIo	114	4xIo	83.2	5xIo	52.8	6xIo	28.2
负载	100~132Vac Vo(%)	180~305Vac Vo(%)	时间 (Max.)																																									
3xIo	50	66	100ms																																									
4xIo	37	50	70ms																																									
5xIo	30	40	40ms																																									
6xIo	10	10	15ms																																									
Load	Iout_Time(ms)																																											
3xIo	115.2																																											
4xIo	83.4																																											
5xIo	52.6																																											
6xIo	27.8																																											
Load	Iout_Time(ms)																																											
3xIo	114																																											
4xIo	83.2																																											
5xIo	52.8																																											
6xIo	28.2																																											
4	PULSE CURRENT CAPABILTY		I/P:230VAC O/P:TESTING Ta:25°C	TEST : <u>OK</u>																																								
5	LED Status Indictors	LED : <table><thead><tr><th>Description</th><th>Output of alarm</th></tr></thead><tbody><tr><td>Restore Factory Settings</td><td>Green : 3 Blink/Phase </td></tr><tr><td>DC OK</td><td>Green </td></tr><tr><td>DC Fail</td><td>Red </td></tr><tr><td>Overload (175%~190% rated current) (200%~250% rated current)</td><td>Red : 1 Blink/Phase </td></tr><tr><td>Over voltage</td><td>Red : 2 Blink/Phase </td></tr><tr><td>Over temperature</td><td>Red : 3 Blink/Phase </td></tr><tr><td>Against Inverse Voltages From The Load</td><td>Red : 4 Blink/Phase </td></tr><tr><td>High Ambient Temperature Warning</td><td>Red : Blink </td></tr><tr><td>Others (None)</td><td>Red : 5 Blink/Phase </td></tr></tbody></table> Note: Others include protection status AC VPP, Internal Communication error and EEPROM error.	Description	Output of alarm	Restore Factory Settings	Green : 3 Blink/Phase 	DC OK	Green 	DC Fail	Red 	Overload (175%~190% rated current) (200%~250% rated current)	Red : 1 Blink/Phase 	Over voltage	Red : 2 Blink/Phase 	Over temperature	Red : 3 Blink/Phase 	Against Inverse Voltages From The Load	Red : 4 Blink/Phase 	High Ambient Temperature Warning	Red : Blink 	Others (None)	Red : 5 Blink/Phase 	I/P:230VA0C O/P:FULL LOAD Ta:25°C	TEST : <u>OK</u>																				
Description	Output of alarm																																											
Restore Factory Settings	Green : 3 Blink/Phase 																																											
DC OK	Green 																																											
DC Fail	Red 																																											
Overload (175%~190% rated current) (200%~250% rated current)	Red : 1 Blink/Phase 																																											
Over voltage	Red : 2 Blink/Phase 																																											
Over temperature	Red : 3 Blink/Phase 																																											
Against Inverse Voltages From The Load	Red : 4 Blink/Phase 																																											
High Ambient Temperature Warning	Red : Blink 																																											
Others (None)	Red : 5 Blink/Phase 																																											

6	PARALLEL	Up to 3840W (3+1), please refer to Function Manual for more details	I/P: TESTING O/P: TESTING LOAD Ta:25°C	TEST : <u>OK</u>
7	PEAK Power	I/P: 100/200VAC O/P: -----100VAC ———200VAC		TEST : <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5/Q6 : Rated: 90A/650V	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	Q5 VDS: (1) 564V (2) 564V (3) 560V (4) 564V (5) 568V (6) 568V (7) 564V (8) 568V	Q6 VDS: (1) 584V (2) 576V (3) 576V (4) 580V (5) 580V (6) 580V (7) 580V (8) 580V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1/Q2 : Rated: 68A/600V	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	Q1 VDS: (1) 511V (2) 457V (3) 508V (4) 504V (5) 460V (6) 477V (7) 504V (8) 487V	Q2 VDS: (1) 484V (2) 460V (3) 487V (4) 487V (5) 481V (6) 470V (7) 477V (8) 481V

3	P.F.C DIODE	D8/D9 : Rated: 10A/650V	I/P: High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	D8 (1) 511V (2) 484V (3) 514V (4) 514V (5) 511V	D9 (1) 487V (2) 477V (3) 487V (4) 487V (5) 487V
4	Diode Peak Voltage	Q101 / Q104 : Rated: 74A/200V	AC ON/OFF I/P: High-Line +3V =308 V <u>VO=Vomax</u> O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load <u>VO=Vonormal</u> O/P: (1) Full Load Ta:25°C	Q101: <u>VO=Vomax</u> VDS: (1) 129.5V (2) 129.1V (3) 129.1V (4) 129.1V (5) 129.1V (6) 130.9V (7) 127.4V (8) 124.7V (9) 130.9V <u>VO=Vonormal</u> (1) 119.8V	Q104: <u>VO=Vomax</u> VDS: (1) 129.1V (2) 129.1V (3) 128.2V (4) 128.2V (5) 128.2V (6) 132.7V (7) 126.5V (8) 122.9V (9) 131.8V <u>VO=Vonormal</u> (1) 119.4V
5	AUX Transistor (D to S) or (C to E) Peak Voltage	U2 : Rated: 725V/654mA	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	VDS: (1) 547V (2) 551V (3) 543V (4) 559V (5) 547V (6) 555V (7) 543V (8) 559V	
6	AUX Clamp Diode Peak Voltage	D 19: Rated: 1A/ 650V	AC ON/OFF I/P : High-Line +3V = 308V O/P : (1) Dynamic Load	(1) 573V (2) 513V	

			90%Duty/1KHz (2) Full load continue Ta:25°C	
7	AUX Diode Peak Voltage	D200 : Rated : 1A/600V D22 : Rated : 3A/200V	AC ON/OFF I/P: High-Line +3V =308 V O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load Ta:25°C	D200: (1) 118.9V (2) 120.6V (3) 118.9V (4) 118V (5) 120.6V (6) 119.7V (7) 119.7V (8) 118V (9) 119.7V D22: (1) 142V (2) 143.9V (3) 143.9V (4) 142V (5) 142.9V (6) 143.9V (7) 142.9V (8) 139.1V (9) 142.9V
8	Input Capacitor Voltage	C5 : Rated: 220μ /450V	I/P: High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue (5) Peak Load on/off (6) Peak Load continue Ta:25°C	(1) 446V (2)454 V (3) 446V (4) 446V (5) 456V (6) 446V
10	Control IC Voltage Test	PWM IC U1 : Rated : 12.5V~ 27.9V PFC IC U5 : Rated : 11.6V~ 21V O/P IC U101: Rated: 4.75V~38V IC U205 : Rated : 3.3V~36V IC U401 : SGM8210-2 Rated : 3.3V~24V IC U404 : Rated : 3.3V~24V AUX IC U2 : Rated : 5.65V~6.8V	AC ON/OFF I/P: High-Line +3V =308V O/P: (1) Full Load (2) Output Short (3) O.L.P (4) O.V.P. (5) No Load VR min (Low Line) Ta:25°C	U1 (1) 14.6V (2) 14.5V (3) 14.5V (4) 14.4V (5) 14.4V U404 (1) 5.16V (2) 5.24V (3) 5.04V (4) 5.04V (5) 5.04V U5 (1) 15.1V (2) 15.1V (3) 15.1V (4) 15V (5) 14.9V U2 (1) 6.69V (2) 6.73V (3) 6.69V (4) 6.53V (5) 6.53V U101 (1) 11.7V (2) 12.2V (3) 11.6V (4) 11.5V (5) 11.5V U9 (1) 3.33V (2) 3.32V (3) 3.33V (4) 3.32V (5) 3.32V

		MCU IC U9 : Rated : 2V~3.6V Level: 3.2835~3.3165V MCU IC U306: Rated : 2.4V~ 3.6V Level: 3.2835~3.3165V		U205 (1) 11.5V (2) 11.5V (3) 11.5V (4) 11.5V (5) 11.5V	U306 (1) 3.33V (2) 3.33V (3) 3.33V (4) 3.33V (5) 3.33V
--	--	--	--	---	---

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4 KVAC/min I/P-FG : 2 KVAC/min O/P-FG:1.5 KVAC/min O/P-DC OK: 0.5 KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min O/P-DC OK: 0.6 KVAC/min Ta:25°C	I/P-O/P: 7.24mA I/P-FG: 8.23mA O/P-FG: 5.5mA O/P-DC OK: 0.006mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P: 50GΩ I/P-FG: 50GΩ O/P-FG: 50GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100mΩ	40A /2min Ta:25°C	9mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032 (CISPR32) BS EN/EN61204-3 CNS15936 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032 (CISPR32) BS EN/EN61204-3 CNS15936 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN 61000-4-2 AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	BS EN/EN 61000-4-4 INPUT : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD	CRITERIA A

			Ta : 25°C	
6	SURGE	BS E /EN 61000-4-5 L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																																								
1	TEMPERATURE RISE TEST	MODEL : XDR-960-48 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=23.3°C 2. HIGH AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=60.8°C																																																																																																																										
		<table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta=27.9°C</th><th>HIGH AMBIENT Ta=60.8°C</th></tr><tr><td>1</td><td>L5</td><td>52.7°C</td><td>88.1°C</td></tr><tr><td>3</td><td>LF3</td><td>57.9°C</td><td>91.8°C</td></tr><tr><td>4</td><td>C2</td><td>49.9°C</td><td>84.8°C</td></tr><tr><td>5</td><td>ZNR1</td><td>51.2°C</td><td>86.2°C</td></tr><tr><td>6</td><td>BD1</td><td>58.2°C</td><td>91.2°C</td></tr><tr><td>7</td><td>BD2</td><td>56.4°C</td><td>89.0°C</td></tr><tr><td>8</td><td>C103</td><td>52.9°C</td><td>87.8°C</td></tr><tr><td>9</td><td>Q110</td><td>58.7°C</td><td>94.3°C</td></tr><tr><td>10</td><td>LF100</td><td>56.3°C</td><td>91.6°C</td></tr><tr><td>11</td><td>LF1</td><td>51.9°C</td><td>86.3°C</td></tr><tr><td>12</td><td>C1</td><td>51.4°C</td><td>86.5°C</td></tr><tr><td>13</td><td>U303</td><td>56.8°C</td><td>91.1°C</td></tr><tr><td>14</td><td>U304</td><td>57.3°C</td><td>91.5°C</td></tr><tr><td>15</td><td>T1coil</td><td>78.0°C</td><td>116.9°C</td></tr><tr><td>16</td><td>T1core</td><td>69.9°C</td><td>109.3°C</td></tr><tr><td>17</td><td>C109</td><td>56.7°C</td><td>91.9°C</td></tr><tr><td>18</td><td>C107</td><td>57.5°C</td><td>93.6°C</td></tr><tr><td>19</td><td>C53</td><td>52.9°C</td><td>87.9°C</td></tr><tr><td>20</td><td>C202</td><td>54.3°C</td><td>88.9°C</td></tr><tr><td>21</td><td>L7</td><td>64.4°C</td><td>99.6°C</td></tr><tr><td>22</td><td>T2</td><td>52.9°C</td><td>88.3°C</td></tr><tr><td>23</td><td>C52</td><td>53.7°C</td><td>89.4°C</td></tr><tr><td>24</td><td>Q6</td><td>56.2°C</td><td>91.2°C</td></tr><tr><td>25</td><td>U7</td><td>53.8°C</td><td>88.5°C</td></tr><tr><td>26</td><td>Q5</td><td>58.3°C</td><td>93.4°C</td></tr><tr><td>27</td><td>U1</td><td>54.8°C</td><td>90.8°C</td></tr><tr><td>28</td><td>C922</td><td>49.1°C</td><td>82.7°C</td></tr><tr><td>29</td><td>Q2</td><td>61.0°C</td><td>95.8°C</td></tr><tr><td>30</td><td>Q1</td><td>61.6°C</td><td>96.6°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta=27.9°C	HIGH AMBIENT Ta=60.8°C	1	L5	52.7°C	88.1°C	3	LF3	57.9°C	91.8°C	4	C2	49.9°C	84.8°C	5	ZNR1	51.2°C	86.2°C	6	BD1	58.2°C	91.2°C	7	BD2	56.4°C	89.0°C	8	C103	52.9°C	87.8°C	9	Q110	58.7°C	94.3°C	10	LF100	56.3°C	91.6°C	11	LF1	51.9°C	86.3°C	12	C1	51.4°C	86.5°C	13	U303	56.8°C	91.1°C	14	U304	57.3°C	91.5°C	15	T1coil	78.0°C	116.9°C	16	T1core	69.9°C	109.3°C	17	C109	56.7°C	91.9°C	18	C107	57.5°C	93.6°C	19	C53	52.9°C	87.9°C	20	C202	54.3°C	88.9°C	21	L7	64.4°C	99.6°C	22	T2	52.9°C	88.3°C	23	C52	53.7°C	89.4°C	24	Q6	56.2°C	91.2°C	25	U7	53.8°C	88.5°C	26	Q5	58.3°C	93.4°C	27	U1	54.8°C	90.8°C	28	C922	49.1°C	82.7°C	29	Q2	61.0°C	95.8°C	30	Q1	61.6°C	96.6°C
NO	Position	ROOM AMBIENT Ta=27.9°C	HIGH AMBIENT Ta=60.8°C																																																																																																																									
1	L5	52.7°C	88.1°C																																																																																																																									
3	LF3	57.9°C	91.8°C																																																																																																																									
4	C2	49.9°C	84.8°C																																																																																																																									
5	ZNR1	51.2°C	86.2°C																																																																																																																									
6	BD1	58.2°C	91.2°C																																																																																																																									
7	BD2	56.4°C	89.0°C																																																																																																																									
8	C103	52.9°C	87.8°C																																																																																																																									
9	Q110	58.7°C	94.3°C																																																																																																																									
10	LF100	56.3°C	91.6°C																																																																																																																									
11	LF1	51.9°C	86.3°C																																																																																																																									
12	C1	51.4°C	86.5°C																																																																																																																									
13	U303	56.8°C	91.1°C																																																																																																																									
14	U304	57.3°C	91.5°C																																																																																																																									
15	T1coil	78.0°C	116.9°C																																																																																																																									
16	T1core	69.9°C	109.3°C																																																																																																																									
17	C109	56.7°C	91.9°C																																																																																																																									
18	C107	57.5°C	93.6°C																																																																																																																									
19	C53	52.9°C	87.9°C																																																																																																																									
20	C202	54.3°C	88.9°C																																																																																																																									
21	L7	64.4°C	99.6°C																																																																																																																									
22	T2	52.9°C	88.3°C																																																																																																																									
23	C52	53.7°C	89.4°C																																																																																																																									
24	Q6	56.2°C	91.2°C																																																																																																																									
25	U7	53.8°C	88.5°C																																																																																																																									
26	Q5	58.3°C	93.4°C																																																																																																																									
27	U1	54.8°C	90.8°C																																																																																																																									
28	C922	49.1°C	82.7°C																																																																																																																									
29	Q2	61.0°C	95.8°C																																																																																																																									
30	Q1	61.6°C	96.6°C																																																																																																																									

		<table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta=27.9℃</th><th>HIGH AMBIENT Ta=60.8℃</th></tr><tr><td>31</td><td>T3</td><td>60.1℃</td><td>95.4℃</td></tr><tr><td>32</td><td>L2</td><td>66.5℃</td><td>102.4℃</td></tr><tr><td>33</td><td>RTH3</td><td>61.8℃</td><td>97.6℃</td></tr><tr><td>34</td><td>C5</td><td>50.6℃</td><td>86.3℃</td></tr><tr><td>35</td><td>C6</td><td>52.4℃</td><td>88.0℃</td></tr><tr><td>36</td><td>C11</td><td>57.3℃</td><td>92.6℃</td></tr><tr><td>37</td><td>R25</td><td>55.7℃</td><td>90.8℃</td></tr><tr><td>38</td><td>Q105</td><td>63.7℃</td><td>100.3℃</td></tr><tr><td>39</td><td>Q102</td><td>62.7℃</td><td>99.2℃</td></tr><tr><td>40</td><td>Q101</td><td>63.1℃</td><td>99.8℃</td></tr><tr><td>41</td><td>U101</td><td>62.3℃</td><td>98.4℃</td></tr><tr><td>42</td><td>J103</td><td>59.3℃</td><td>95.0℃</td></tr><tr><td>43</td><td>U2</td><td>70.5℃</td><td>106.8℃</td></tr><tr><td>44</td><td>U306</td><td>57.7℃</td><td>92.2℃</td></tr><tr><td>45</td><td>U400</td><td>57.3℃</td><td>91.9℃</td></tr><tr><td>46</td><td>D8</td><td>69.6℃</td><td>104.2℃</td></tr><tr><td>47</td><td>U11</td><td>61.8℃</td><td>96.6℃</td></tr><tr><td>48</td><td>U5</td><td>58.0℃</td><td>92.2℃</td></tr><tr><td>49</td><td>D29</td><td>57.0℃</td><td>91.3℃</td></tr><tr><td>50</td><td>D10</td><td>63.0℃</td><td>97.5℃</td></tr><tr><td>51</td><td>RTH5</td><td>59.8℃</td><td>95.8℃</td></tr><tr><td>52</td><td>U307</td><td>56.4℃</td><td>90.8℃</td></tr><tr><td>53</td><td>U9</td><td>55.4℃</td><td>89.8℃</td></tr><tr><td>54</td><td>D17</td><td>55.0℃</td><td>91.5℃</td></tr></table>			NO	Position	ROOM AMBIENT Ta=27.9℃	HIGH AMBIENT Ta=60.8℃	31	T3	60.1℃	95.4℃	32	L2	66.5℃	102.4℃	33	RTH3	61.8℃	97.6℃	34	C5	50.6℃	86.3℃	35	C6	52.4℃	88.0℃	36	C11	57.3℃	92.6℃	37	R25	55.7℃	90.8℃	38	Q105	63.7℃	100.3℃	39	Q102	62.7℃	99.2℃	40	Q101	63.1℃	99.8℃	41	U101	62.3℃	98.4℃	42	J103	59.3℃	95.0℃	43	U2	70.5℃	106.8℃	44	U306	57.7℃	92.2℃	45	U400	57.3℃	91.9℃	46	D8	69.6℃	104.2℃	47	U11	61.8℃	96.6℃	48	U5	58.0℃	92.2℃	49	D29	57.0℃	91.3℃	50	D10	63.0℃	97.5℃	51	RTH5	59.8℃	95.8℃	52	U307	56.4℃	90.8℃	53	U9	55.4℃	89.8℃	54	D17	55.0℃	91.5℃
NO	Position	ROOM AMBIENT Ta=27.9℃	HIGH AMBIENT Ta=60.8℃																																																																																																					
31	T3	60.1℃	95.4℃																																																																																																					
32	L2	66.5℃	102.4℃																																																																																																					
33	RTH3	61.8℃	97.6℃																																																																																																					
34	C5	50.6℃	86.3℃																																																																																																					
35	C6	52.4℃	88.0℃																																																																																																					
36	C11	57.3℃	92.6℃																																																																																																					
37	R25	55.7℃	90.8℃																																																																																																					
38	Q105	63.7℃	100.3℃																																																																																																					
39	Q102	62.7℃	99.2℃																																																																																																					
40	Q101	63.1℃	99.8℃																																																																																																					
41	U101	62.3℃	98.4℃																																																																																																					
42	J103	59.3℃	95.0℃																																																																																																					
43	U2	70.5℃	106.8℃																																																																																																					
44	U306	57.7℃	92.2℃																																																																																																					
45	U400	57.3℃	91.9℃																																																																																																					
46	D8	69.6℃	104.2℃																																																																																																					
47	U11	61.8℃	96.6℃																																																																																																					
48	U5	58.0℃	92.2℃																																																																																																					
49	D29	57.0℃	91.3℃																																																																																																					
50	D10	63.0℃	97.5℃																																																																																																					
51	RTH5	59.8℃	95.8℃																																																																																																					
52	U307	56.4℃	90.8℃																																																																																																					
53	U9	55.4℃	89.8℃																																																																																																					
54	D17	55.0℃	91.5℃																																																																																																					
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 128%LOAD Ta : 25℃	TEST : OK																																																																																																				
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 80%/100 %LOAD Ta= -45℃/-35℃	TEST : OK																																																																																																				
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60℃/95 %R.H NO DAMAGE	I/P : 315VAC O/P : FULL LOAD Ta= 60℃ HUMIDITY= 95 %R.H	TEST : OK																																																																																																				
5	TEMPERATURE COEFFICIENT	± 0.03 %/℃(0~60℃)	I/P : 230 VAC O/P : FULL LOAD	± 0.006%/℃(0~60℃)																																																																																																				
6	STORAGE TEMPERATURE TEST	-40~85℃	1. Thermal shock Temperature : -45℃~ +90℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC																																																																																																					
7	THERMAL SHOCK TEST	-30~60℃	1. Thermal shock Temperature : -35℃~ +65℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition :																																																																																																					

			15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C109 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60°C LIFE TIME	(1) 713196 HRS (2) 90498 HRS (3) 82558 HRS (4) 124378 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 819.6K hrs min. Telcordia SR-332 (Bellcore) ; 113.3K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Hanxr	Liutt	Wangzd

2020.10.1 TAG-QA-009