



Test Report: GSM220B15

220W AC-DC Reliable Green Medical Adaptor

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST


DESIGN VERIFY TEST

OUTPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -5%~ 5%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -1.208%~ 1.879 %
2	LINE REGULATION (Max)	V1: -1%~ 1%	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0 %~ 0.068 %
3	LOAD REGULATION(Max)	V1: -5%~ 5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -1.208%~ 1.879 %
4	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	< ±5%
5	RIPPLE & NOISE(Max)	V1: 80mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 9mVp-p
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>high frequency :</p> </div> <div style="text-align: center;"> <p>low frequency :</p> </div> </div>		
6	SET UP TIME(Max)	230VAC/2000ms 115VAC/2000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 1136 ms 115VAC/ 1136 ms
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> </div> <div style="text-align: center;"> <p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> </div> </div>		
7	RISE TIME (Max)	230VAC/50ms 115VAC/50ms	I/P : 230 VAC I/P : 115 VAC	230VAC/ 14.4 ms 115VAC/ 15.4 ms

		O/P : FULL LOAD Ta : 25°C	
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage	
8	HOLD UP TIME (Typ.)	230VAC/24ms 115VAC/24ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C
		230VAC/ 32 ms	115VAC/ 32 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
9	DYNAMIC LOAD	V1: 1500mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /90%DUTY / 1KHZ Ta:25°C
FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ	



INPUT FUNCTION TEST

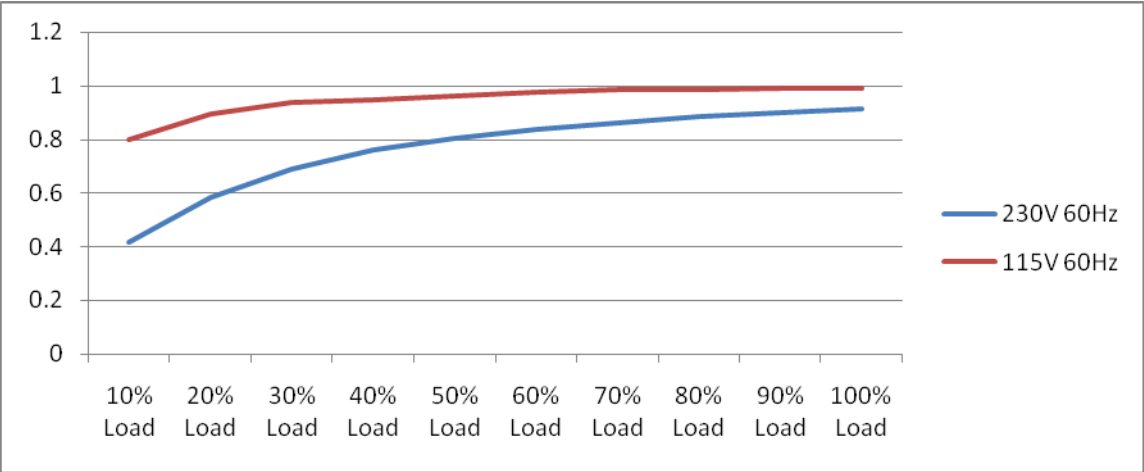NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																	
1	INPUT VOLTAGE RANGE	80VAC~264VAC 113VDC~370VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD Ta:25°C	(1) 73V~264V (2) 106.6Vdc~370Vdc/FULL LOAD 106.6Vdc~370Vdc/50% LOAD (3) 106.6Vdc~370Vdc/FULL LOAD 106.6Vdc~370Vdc/50% LOAD																																	
			I/P: LOW-LINE-3V=97 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK																																	
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:100 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK																																	
3	INPUT CURRENT (Typ.)	230V/ 2A 115V/ 4A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I = 0.976A/ 230VAC I = 1.90A/ 115VAC																																	
4	LEAKAGE CURRENT	<0.1mA / 264 VAC	I/P : 264 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.0745 mA N-FG : 0.0745 mA																																	
5	NO LOAD CONSUMPTION	< 0.15W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.0839 W < 0.1137 W																																	
6	POWER FACTOR (Typ.)	0.91/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.952 /230VAC PF= 0.992/115VAC																																	
<p>PF vs LOAD</p>  <table border="1"> <caption>PF vs LOAD Data</caption> <thead> <tr> <th>Load (%)</th> <th>230V 60Hz PF</th> <th>115V 60Hz PF</th> </tr> </thead> <tbody> <tr><td>10%</td><td>0.4</td><td>0.8</td></tr> <tr><td>20%</td><td>0.6</td><td>0.9</td></tr> <tr><td>30%</td><td>0.7</td><td>0.95</td></tr> <tr><td>40%</td><td>0.78</td><td>0.97</td></tr> <tr><td>50%</td><td>0.82</td><td>0.98</td></tr> <tr><td>60%</td><td>0.85</td><td>0.99</td></tr> <tr><td>70%</td><td>0.87</td><td>0.995</td></tr> <tr><td>80%</td><td>0.88</td><td>0.998</td></tr> <tr><td>90%</td><td>0.89</td><td>0.999</td></tr> <tr><td>100%</td><td>0.9</td><td>1.0</td></tr> </tbody> </table>					Load (%)	230V 60Hz PF	115V 60Hz PF	10%	0.4	0.8	20%	0.6	0.9	30%	0.7	0.95	40%	0.78	0.97	50%	0.82	0.98	60%	0.85	0.99	70%	0.87	0.995	80%	0.88	0.998	90%	0.89	0.999	100%	0.9	1.0
Load (%)	230V 60Hz PF	115V 60Hz PF																																			
10%	0.4	0.8																																			
20%	0.6	0.9																																			
30%	0.7	0.95																																			
40%	0.78	0.97																																			
50%	0.82	0.98																																			
60%	0.85	0.99																																			
70%	0.87	0.995																																			
80%	0.88	0.998																																			
90%	0.89	0.999																																			
100%	0.9	1.0																																			
7	EFFICIENCY(Typ.)	90%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	90.47%																																	

EFFICIENCY vs LOAD

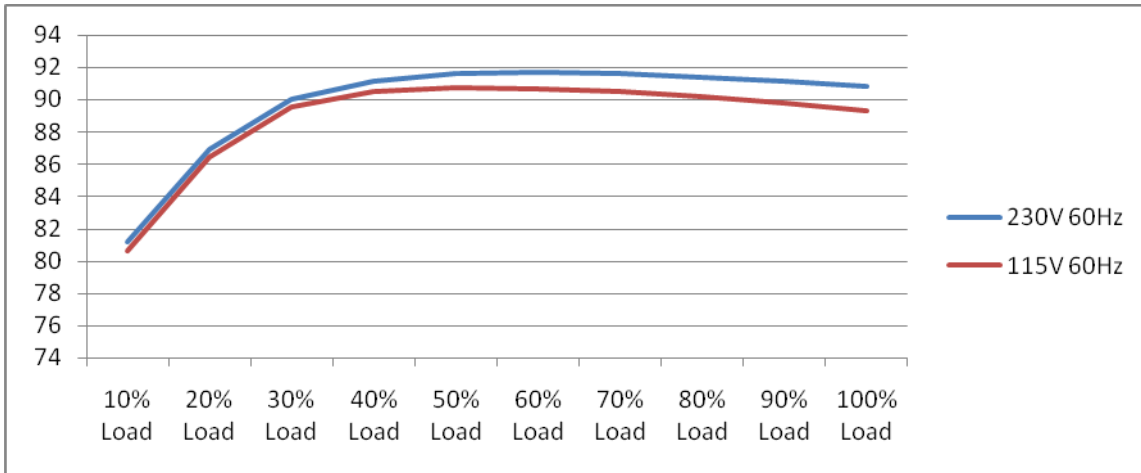

8	INRUSH CURRENT(Typ.)	230V/110A 115V/90A COLD START	I/P : 230 VAC/115VAC O/P : FULL LOAD Ta : 25°C	I = 108A/ 230VAC I = 52.8A/ 115VAC
	INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A)		INPUT=115VAC/60HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A)	

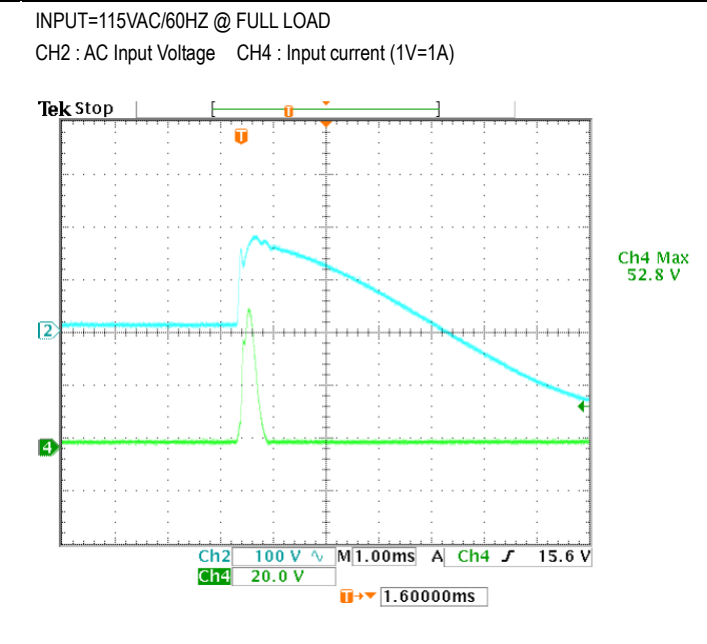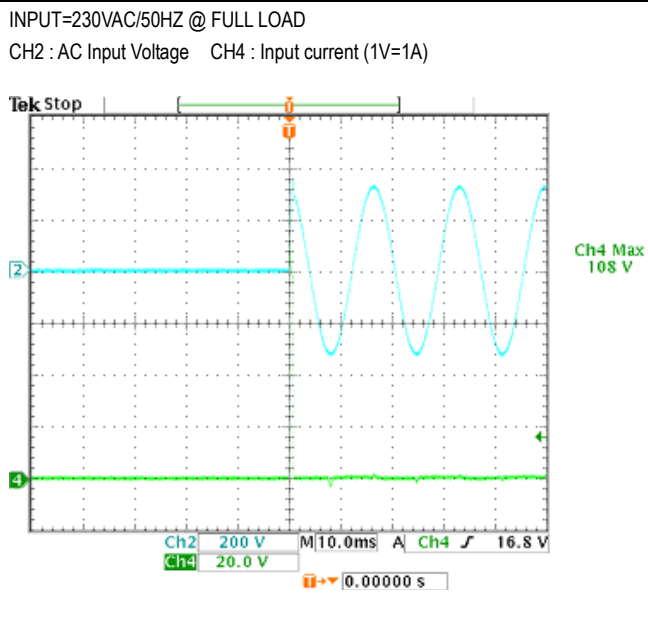

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
----	-----------	---------------	----------------	--------

1	OVER LOAD PROTECTION	105%~ 135%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	108.35%/ 264VAC 108.35%/ 230VAC 108.28%/100VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	15.75V~20.25V	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P: MIN LOAD Ta:25°C	18.2V/ 264VAC 18.2V/ 230VAC 18.2V/ 90VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type :	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5 Rated : 18A/ 600V	I/P: High-Line +3V =267V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Full Load Continue Ta:25°C	VDS: (1) 488V (2) 480V (3) 444V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 15.8 A/ 600 V	I/P: High-Line +3V =267V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Full Load Continue Ta:25°C	VDS: (1) 548V (2) 496V (3) 496V
3	P.F.C DIODE	D2 Rated : 15 A/ 600 V	I/P: High-Line +3V =267 V AC ON/OFF O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	(1) 444V (2) 446V (3) 442V (4) 446V
4	Diode Peak Voltage	Q101 Rated : 75A/60V	I/P: High-Line +3V =267 V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Full Load Continue Ta:25°C	Q101: VDS: (1) 35.0V (2) 9.92V (3) 34.2V
5	Input Capacitor Voltage	C5 Rated: : 220 μ /450 V 105 °C	I/P: High-Line +3V =267 V O/P: (1) Full Load input on/off (2) Min load input on /Off	(1) 436V (2) 438V (3) 428V

			(3)Full Load /Min load Change Ta:25°C	
6	Control IC Voltage Test	PWM IC U1 Rated : 38V -0.4 V(MIN.)	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta:25°C	(1) 26.6V (2) 20.2V (3) 22.2V (4) 28.6V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min	I/P-O/P:4.4 KVAC/min Ta:25°C	I/P-O/P: 1.996mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ	I/P-O/P: 600 VDC Ta:25°C	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55011 (CISPR11), FCC PART 15 /CISPR22, CAN ICES-3(B)/NMB-3(B) CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55011 (CISPR11), FCC PART 15 /CISPR22, CAN ICES-3(B)/NMB-3(B) CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	BS EN/EN61000-4-4 INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	BS EN/EN61000-4-5 L-N : 1KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
----	-----------	---------------	----------------	--------

1	TEMPERATURE RISE TEST	<p>MODEL : GSM220B20</p> <p>1. ROOM AMBIENT BURN-IN : 1HRS I/P : 230VAC O/P : FULL LOAD Ta=17.7°C</p> <p>2. HIGH AMBIENT BURN-IN : 1HRS I/P : 230VAC O/P : FULL LOAD Ta=39.5 °C</p> <table border="1" data-bbox="502 436 1460 1288"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 17.7 °C</th> <th>HIGH AMBIENT Ta= 39.5 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>40.9°C</td><td>65.2°C</td></tr> <tr><td>2</td><td>LF2</td><td>49.1°C</td><td>73.5°C</td></tr> <tr><td>3</td><td>L2</td><td>50.9°C</td><td>76.0°C</td></tr> <tr><td>4</td><td>D3</td><td>53.0°C</td><td>77.1°C</td></tr> <tr><td>5</td><td>Q2</td><td>53.4°C</td><td>77.0°C</td></tr> <tr><td>6</td><td>D2</td><td>54.5°C</td><td>78.2°C</td></tr> <tr><td>7</td><td>L1</td><td>55.0°C</td><td>79.7°C</td></tr> <tr><td>8</td><td>C5</td><td>57.0°C</td><td>80.5°C</td></tr> <tr><td>9</td><td>Q5</td><td>53.1°C</td><td>76.9°C</td></tr> <tr><td>10</td><td>T1</td><td>72.6°C</td><td>101.8°C</td></tr> <tr><td>11</td><td>C81</td><td>54.5°C</td><td>78.7°C</td></tr> <tr><td>12</td><td>RTH2</td><td>52.0°C</td><td>75.6°C</td></tr> <tr><td>13</td><td>C13</td><td>58.5°C</td><td>82.6°C</td></tr> <tr><td>14</td><td>Q101</td><td>60.2°C</td><td>83.9°C</td></tr> <tr><td>15</td><td>C109</td><td>59.6°C</td><td>83.4°C</td></tr> <tr><td>16</td><td>U1</td><td>61.4°C</td><td>84.7°C</td></tr> <tr><td>17</td><td>C101</td><td>58.2°C</td><td>81.7°C</td></tr> <tr><td>18</td><td>R5</td><td>53.3°C</td><td>77.9°C</td></tr> <tr><td>19</td><td>TSW1</td><td>49.0°C</td><td>72.5°C</td></tr> <tr><td>20</td><td>C11</td><td>51.0°C</td><td>75.4°C</td></tr> <tr><td>21</td><td>U4</td><td>55.4°C</td><td>79.2°C</td></tr> <tr><td>22</td><td>BD1</td><td>52.1°C</td><td>75.7°C</td></tr> <tr><td>23</td><td>C1</td><td>46.4°C</td><td>71.0°C</td></tr> <tr><td>24</td><td>CASE</td><td>43.2°C</td><td>64.1°C</td></tr> </tbody> </table>			NO	Position	ROOM AMBIENT Ta= 17.7 °C	HIGH AMBIENT Ta= 39.5 °C	1	LF1	40.9°C	65.2°C	2	LF2	49.1°C	73.5°C	3	L2	50.9°C	76.0°C	4	D3	53.0°C	77.1°C	5	Q2	53.4°C	77.0°C	6	D2	54.5°C	78.2°C	7	L1	55.0°C	79.7°C	8	C5	57.0°C	80.5°C	9	Q5	53.1°C	76.9°C	10	T1	72.6°C	101.8°C	11	C81	54.5°C	78.7°C	12	RTH2	52.0°C	75.6°C	13	C13	58.5°C	82.6°C	14	Q101	60.2°C	83.9°C	15	C109	59.6°C	83.4°C	16	U1	61.4°C	84.7°C	17	C101	58.2°C	81.7°C	18	R5	53.3°C	77.9°C	19	TSW1	49.0°C	72.5°C	20	C11	51.0°C	75.4°C	21	U4	55.4°C	79.2°C	22	BD1	52.1°C	75.7°C	23	C1	46.4°C	71.0°C	24	CASE	43.2°C	64.1°C
NO	Position	ROOM AMBIENT Ta= 17.7 °C	HIGH AMBIENT Ta= 39.5 °C																																																																																																					
1	LF1	40.9°C	65.2°C																																																																																																					
2	LF2	49.1°C	73.5°C																																																																																																					
3	L2	50.9°C	76.0°C																																																																																																					
4	D3	53.0°C	77.1°C																																																																																																					
5	Q2	53.4°C	77.0°C																																																																																																					
6	D2	54.5°C	78.2°C																																																																																																					
7	L1	55.0°C	79.7°C																																																																																																					
8	C5	57.0°C	80.5°C																																																																																																					
9	Q5	53.1°C	76.9°C																																																																																																					
10	T1	72.6°C	101.8°C																																																																																																					
11	C81	54.5°C	78.7°C																																																																																																					
12	RTH2	52.0°C	75.6°C																																																																																																					
13	C13	58.5°C	82.6°C																																																																																																					
14	Q101	60.2°C	83.9°C																																																																																																					
15	C109	59.6°C	83.4°C																																																																																																					
16	U1	61.4°C	84.7°C																																																																																																					
17	C101	58.2°C	81.7°C																																																																																																					
18	R5	53.3°C	77.9°C																																																																																																					
19	TSW1	49.0°C	72.5°C																																																																																																					
20	C11	51.0°C	75.4°C																																																																																																					
21	U4	55.4°C	79.2°C																																																																																																					
22	BD1	52.1°C	75.7°C																																																																																																					
23	C1	46.4°C	71.0°C																																																																																																					
24	CASE	43.2°C	64.1°C																																																																																																					
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 120 % LOAD Ta : 25°C	TEST : OK																																																																																																				
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -35 °C	TEST : OK																																																																																																				
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 40 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																																				
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.009 %/°C (0~50°C)																																																																																																				
6	STORAGE TEMPERATURE TEST	<p>1. Thermal shock Temperature : -40°C ~ +85°C</p> <p>2. Temperature change rate : 25°C / MIN</p> <p>3. Dwell time low and high temperature : 30 MIN/EACH</p> <p>4. Total test cycle : 5 CYCLE</p> <p>5. Input/Output condition : STATIC</p>		OK																																																																																																				



7	THERMAL SHOCK TEST	<ol style="list-style-type: none"> 1. Thermal shock Temperature : $-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$ 2. Temperature change rate : $25^{\circ}\text{C} / \text{MIN}$ 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec 	OK
8	VIBRATION TEST	1 Carton & 1 Set <ol style="list-style-type: none"> (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C 	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C 109 IS THE MOST CRITICAL COMPONENT <ol style="list-style-type: none"> (1) I/P : 230VAC O/P : FULL LOAD Ta= 25°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 40°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 40°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 40°C LIFE TIME 	<ol style="list-style-type: none"> (1) 159661HRS (2) 24580HRS (3) 71921HRS (4) 105265HRS
10	MTBF	1953.3K hrs min. Telcordia SR-332 (Bellcore) ; 208.7K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 50,000 hours @ TA 50°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014