



DC Input: 176-280VDC



Note:10

Features

- Direct KNX bus connection, Support KNX Data Secure
- Supports multiple output modes including dimming, colour temperature, RGBW
- Constant voltage PWM style output with 1 to 4 channels
- Flicker free, complying with CE ErP directive
- Plastic housing with class II and PFC design
- Standby power consumption <0.5W
- Minimum dimming level 0.1%
- Dimming frequency up to 20kHz
- Cooling by free air convection
- 5 years warranty

Applications

- LED strip lighting(CW/WW/Tunable/RGBW)
- LED decorative lighting
- LED architecture lighting
- Household lighting control system
- KNX Building automation

GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

SPWM-240-KN series is a 240W AC/DC LED driver featuring the constant voltage mode with PWM style output. Which is able to maintain the color temperature and the brightness homogeneity when driving all kinds of LED strips. SPWM-240-KN operates from 180~305VAC and offers models with different rated voltage ranging include 24V and 48V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for -20~+90°C case temperature under free air convection. SPWM-240-KN equipped with various function options, such as dimming methodologies with KNX, so as to provide the optimal design flexibility for LED lighting system.

Model Encoding

SPWM - 240 - 24

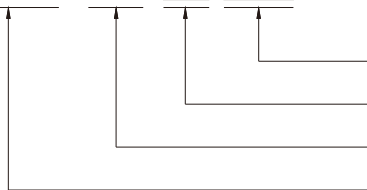

Function options(KN)

Rated output voltage(24V/48V)

Rated wattage


Series name

Type	Function	Note
KN	Built-in KNX interface	In stock

SPECIFICATION		SPWM-240-24 □	SPWM-240-48 □
OUTPUT			
DC VOLTAGE		24V	48V
RATED CURRENT(Max.)		10A	5A
RATED POWER(Max.)		240W	240W
VOLTAGE ADJ. RANGE		23~26V	47~50V
PWM FREQUENCY (Typ.)		200Hz~20kHz(default:3.2KHz), Set by Database	
SETUP, RISE TIME Note.3		500ms, 80ms/230VAC	
HOLD UP TIME (Typ.)		10ms/230VAC	
INPUT			
VOLTAGE RANGE Note.2		180 ~ 305VAC 255 ~ 410VDC (Please refer to "STATIC CHARACTERISTIC" section)	
FREQUENCY RANGE		47 ~ 63Hz	
POWER FACTOR (Typ.)		PF>0.95/230VAC, PF>0.92/277VAC @ full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)	
TOTAL HARMONIC DISTORTION		THD<10%@load≥50%, 230VAC; @load≥75%/277VAC (Please refer to "TOTAL HARMONIC DISTORTION" section)	
EFFICIENCY (Typ.)		93%	94%
AC CURRENT (Typ.)		1.3A / 230VAC 1.1A / 277VAC	
INRUSH CURRENT (Typ.)		COLD START 60A(twidth=700μs measured at 50% Ipeak) at 230VAC; Per NEMA 410	
MAX. NO. of PSUs on 16A CIRCUIT BREAKER		3 units (circuit breaker of type B) / 5 units (circuit breaker of type C) at 230VAC	
LEAKAGE CURRENT		<0.25mA / 277VAC	
STANDBY POWER CONSUMPTION		standby power consumption<0.5W (Dimming off)	
PROTECTION			
OVERLOAD		105~150%, hiccup mode, recovers automatically after fault condition is removed	
SHORT CIRCUIT		Hiccup mode, recovers automatically after fault condition is removed	
OVER VOLTAGE		27 ~ 36V	52~ 63V
		Shut down O/P voltage, re-power on to recover after fault condition is removed	
OVER TEMPERATURE		Shut down O/P voltage, re-power on to recover after fault condition is removed	
ENVIRONMENT			
WORKING TEMP.		Tcase=-20~+90℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)	
MAX. CASE TEMP.		Tcase=90℃	
WORKING HUMIDITY		20 ~ 95% RH non-condensing	
STORAGE TEMP., HUMIDITY		-40 ~ +80℃, 10 ~ 95% RH	
TEMP. COEFFICIENT		±0.03%/℃ (0 ~ 50℃)	
VIBRATION		5 ~ 100Hz, 2G 12min./1cycle, each along X,Y,Z axes according to EN50090-2-2	
SAFETY & EMC			
SAFETY STANDARDS		ENEC BS EN/EN61347-1, BS EN/EN61347-2-13(EL) appendix J suitable for emergency installations(DC input 176-280VDC), BS EN/EN62384; GB/T19510.1,GB/T19510.213; EAC TP TC 004 approved; Design refer to AS/NZS 61347-1, AS/NZS 61347-2-13	
WITHSTAND VOLTAGE		I/P-O/P:3.75kVAC	
ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25℃ / 70% RH	
EMC EMISSION Note.4	Parameter	Standard	Test Level/Note
	Conducted	BS EN/EN55015(CISPR15) ,GB/T17743	-----
	Radiated	BS EN/EN55015(CISPR15) ,GB/T17743	-----
	Harmonic Current	BS EN/EN61000-3-2, GB 17625.1	Class C @load≥50%
	Voltage Flicker	BS EN/EN61000-3-3	-----
EMC IMMUNITY	BS EN/EN61547		
	Parameter	Standard	Test Level/Note
	ESD	BS EN/EN61000-4-2	Level 3, 8kV air ; Level 2, 4kV contact
	Radiated	BS EN/EN61000-4-3	Level 2
	EFT/Burst	BS EN/EN61000-4-4	Level 2
	Surge	BS EN/EN61000-4-5	Level 4, 2kV/Line-Line
	Conducted	BS EN/EN61000-4-6	Level 2
	Magnetic Field	BS EN/EN61000-4-8	Level 2
	Voltage Dips and Interruptions	BS EN/EN61000-4-11:2020	30% dip 10 periods 100% interruption 0.5 periods
OTHERS			
KNX		Certified protocol	
FLICKER Note.9		PstLM ≤ 1, SVM ≤ 0.4	
MTBF		1801.3k hrs min. Telcordia SR-332 (Bellcore) ; 155.5k hrs min. MIL-HDBK-217F (25℃)	
DIMENSION		380*38*28.5mm (L*W*H)	
PACKING		0.54kg; 24 pcs/ 13.26 kg/ 0.61 CUFT	
NOTE			

1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature.
 2. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
 3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
 4. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
 5. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (T_{case} point (or T_{MP}, per DLC), is about 75℃ or less.
 6. Please refer to the warranty statement on MEAN WELL's website at <http://www.meanwell.com>
 7. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).
 8. It is not recommended to connect to capacitive loads
 9. Flicker is measured at full load with the light source provided by MEAN WELL.
 10. RCM is on a voluntary basis. Non IC classification Independent LED control gear is not suitable for residential installations.
- ※ Product Liability Disclaimer: For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>


■ Block Diagram

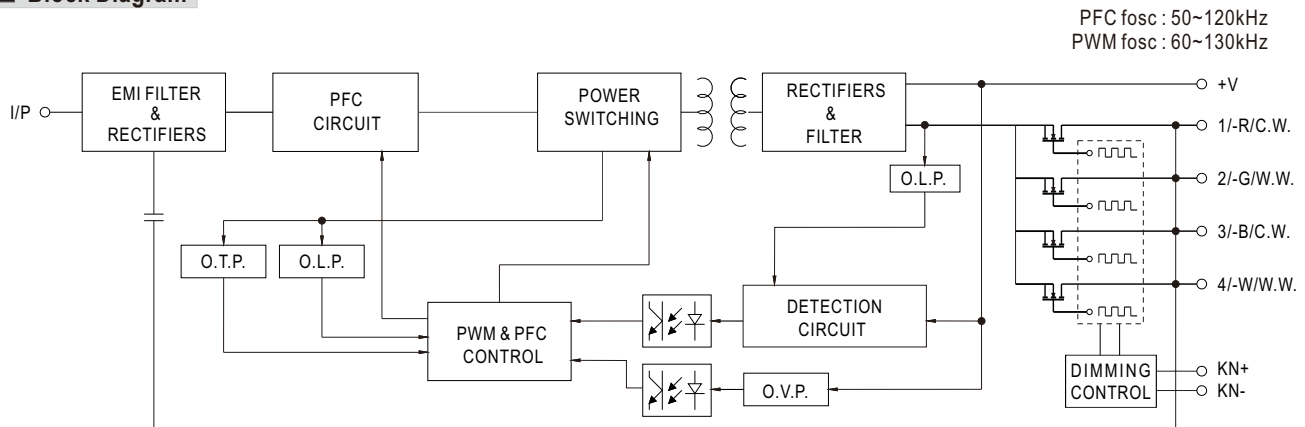

■ DIMMING OPERATION


※ Dimming principle for PWM style output

- Dimming is achieved by varying the duty cycle of the output current.

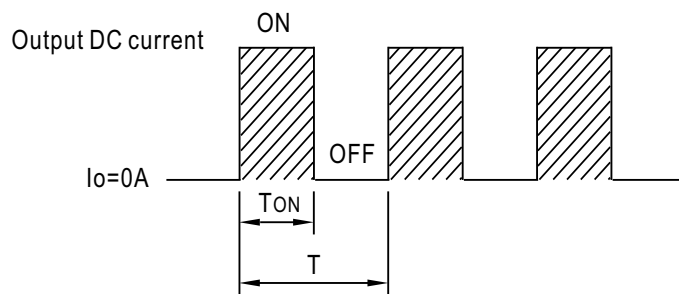

$$\text{Duty cycle(\%)} = \frac{T_{ON}}{T} \times 100\%$$

Output PWM frequency : 200Hz~20kHz(default:3.2kHz)

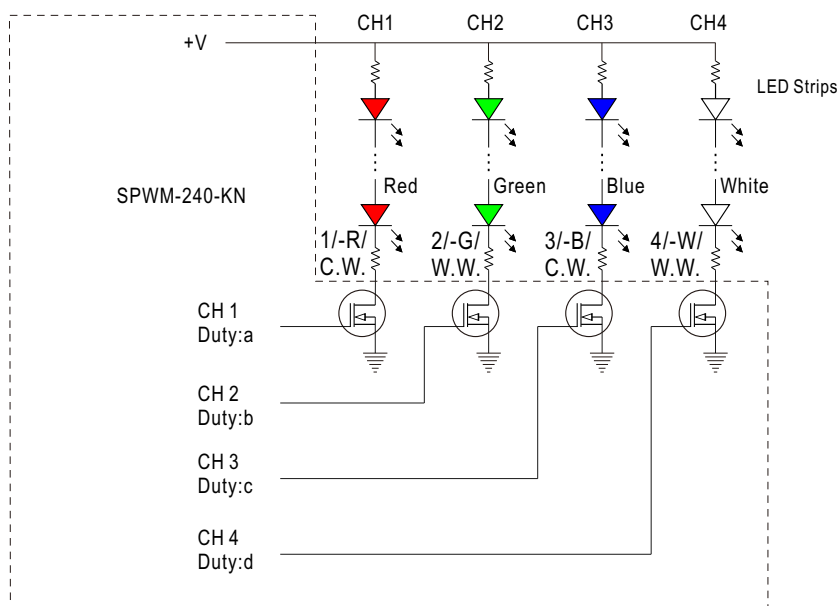

※ KNX dimming function

- The application program(database) can be downloaded via Online Catalogs from ETS or via <http://www.meanwell.com/productCatalog.aspx>

Parametrization options	Description
Operating mode	4x dimming channels 2x colour temperature 1x RGBW 1x colour temperature + 2 dimming channels
Enable channels	The channels of each mode can be flexibly enabled
General	- Template function - PWM frequency - Day/Night function - Operating hours - Telegram rate limitation - KNX Bus power-down behaviour setting - Channel swap - Emergency lighting - Temperature measurement
Specialized parameters	For colour temperature - cold white ratio in percent or light temperature in kelvin - Dim-2-warm - total brightness 100% or brightness 100% per channels For RGBW - HSV or RGB or RGBW model
Staircase light	- Prewarning mode - Permanent mode - Configurable duration time
Lock function	- Lock/Unlock behavior configurable - Release time configurable
Scenes	- Learn scene - Scene1~Scene8
Quick scene	Quick scene1~Quick scene5
Auto-dimming over time	Optional gradient dimming
Sequence	- Sequence1~Sequence5 - Step1~Step5

More parameters can be found in the ETS application database and instruction manual





The device is equipped with KNX Data Secure. KNX Data Secure offers protection against manipulation in building automation and can be configured in the ETS project. Detailed specialist knowledge is required. A device certificate, which is attached to the device, is required for the first configuration. After configuration and ready for runtime (daily) operation, it is recommended to remove the certificate from the device and to store it securely. For details, please refer to the instruction manual.

MEAN WELL



Device Certificate




- Operating mode(Via database)

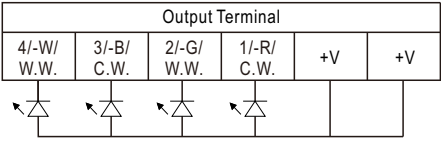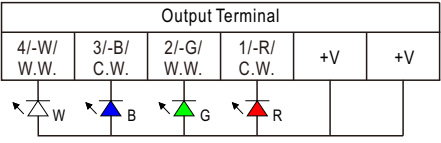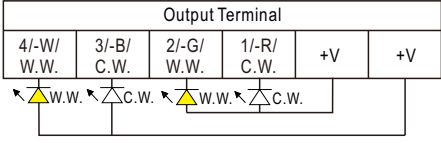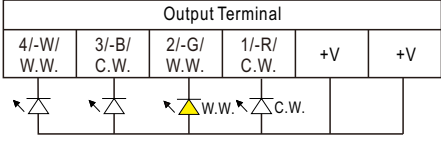Application	Output channels	Output connections schematic diagram
4x dimming channel	1 to 4 channels	
1x RGBW (Channel W is optional)	3 channels or 4 channels	
2x colour temperature	2 channels or 4 channels	
1x colour temperature 2x dimming channel	1 to 4 channels	

■ OUTPUT LOAD vs TEMPERATURE

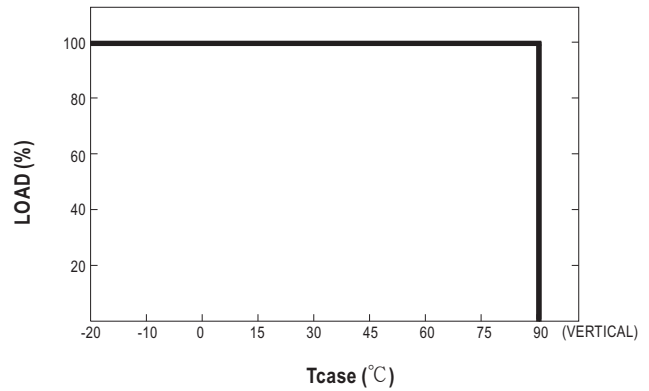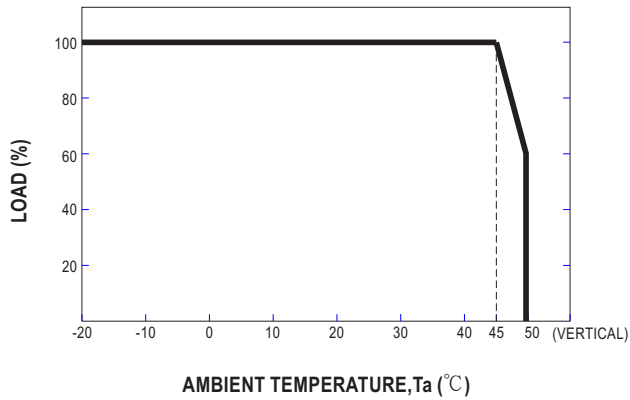


■ STATIC CHARACTERISTICS

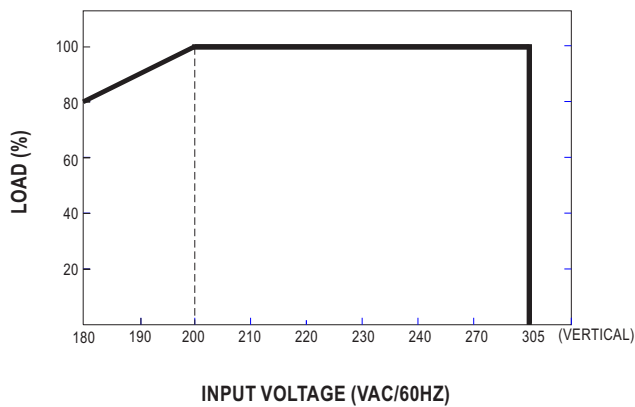


■ TOTAL HARMONIC DISTORTION (THD)

※ 48V Model, T_{case} at 70°C

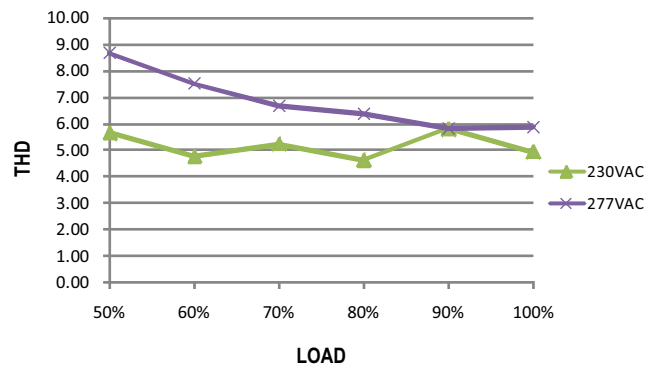

■ POWER FACTOR (PF) CHARACTERISTIC


※ T_{case} at 70°C

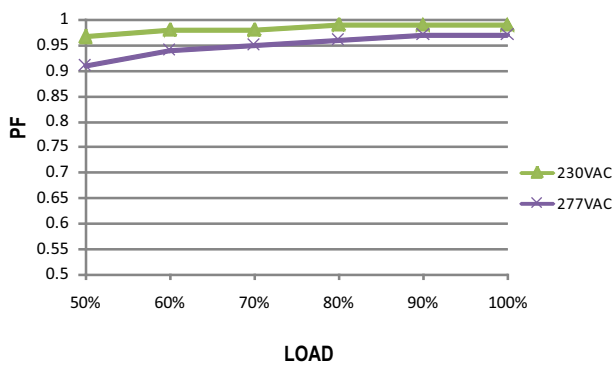


■ EFFICIENCY vs LOAD

SPWM-240-KN series possess superior working efficiency that up to 94% can be reached in field applications.

※ 48V Model, T_{case} at 70°C

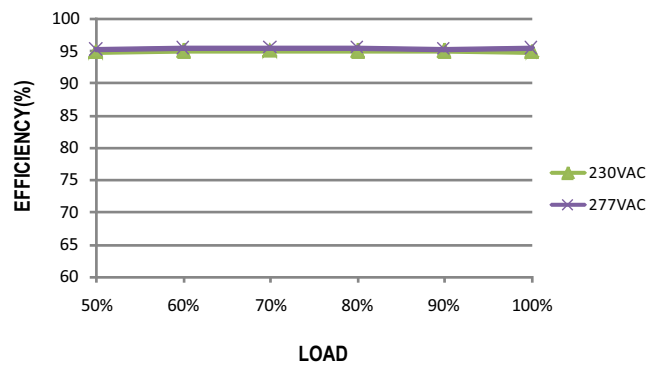


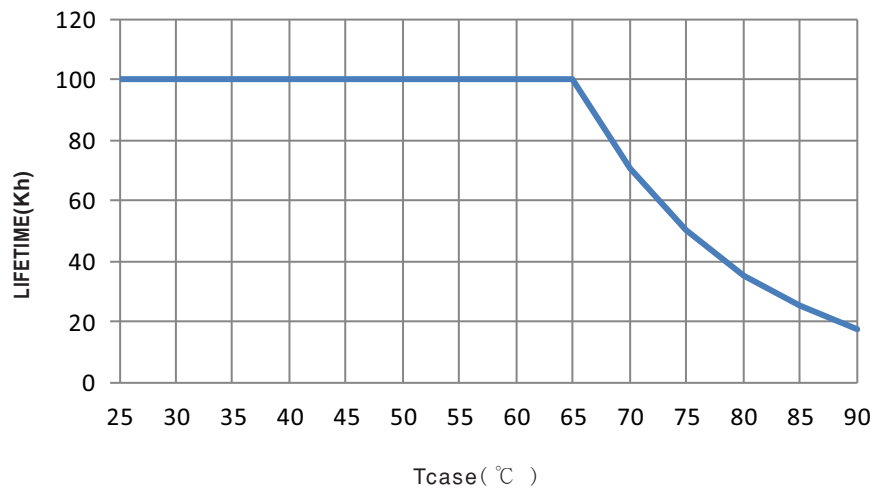LIFE TIME

Mechanical Specification

Case No. SPWM-240-KN


Unit:mm

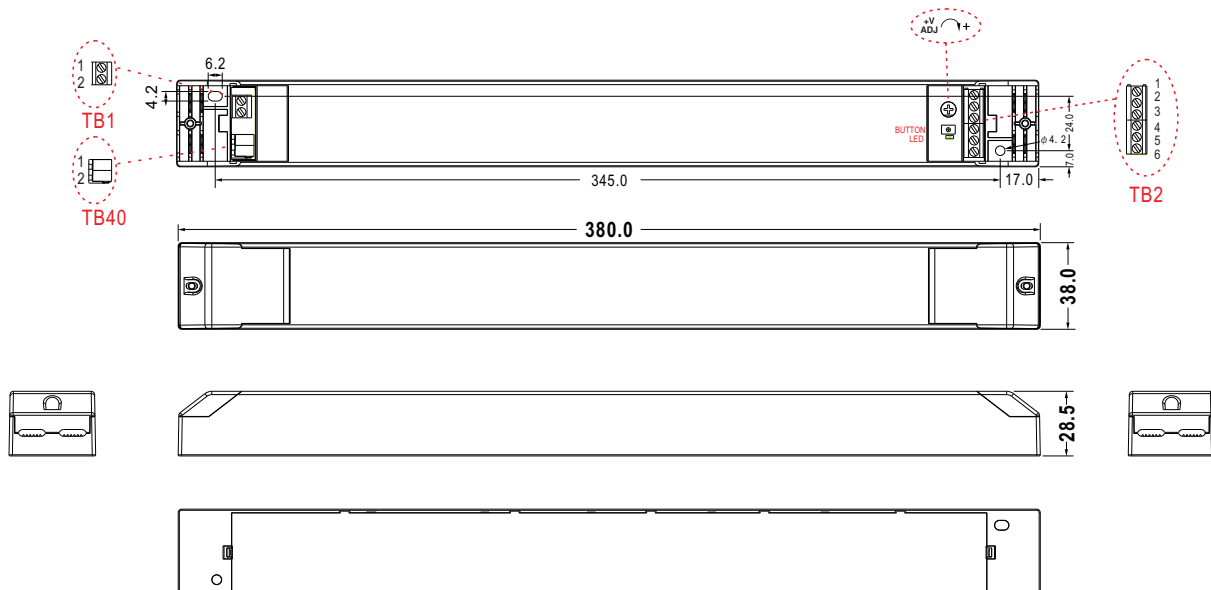Tolerance:±1




Terminal Pin No. Assignment (TB1) :

Pin No.	Assignment
1	AC/L
2	AC/N

TB1 wiring:


Terminal Pin No. Assignment (TB2) :

Pin No.	Assignment
1	+V
2	+V
3	1/-R/C.W.
4	2/-G/W.W.
5	3/-B/C.W.
6	4/-W/W.W.

TB2 wiring:


Terminal Pin No. Assignment (TB40)

Pin No.	Assignment
1	KN-
2	KN+