



Test Report: XDR-960-24

960W AC/DC High-End Ultra Slim Industrial DIN Rail
Power

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

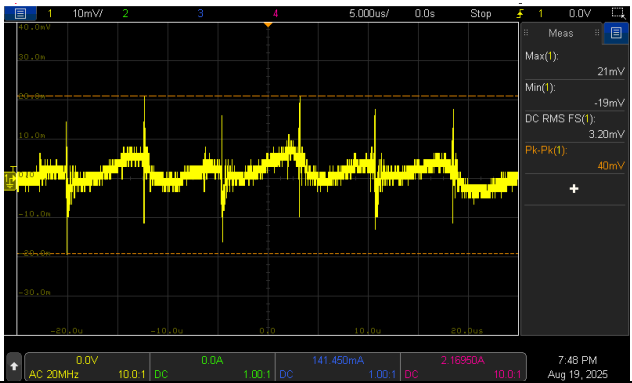
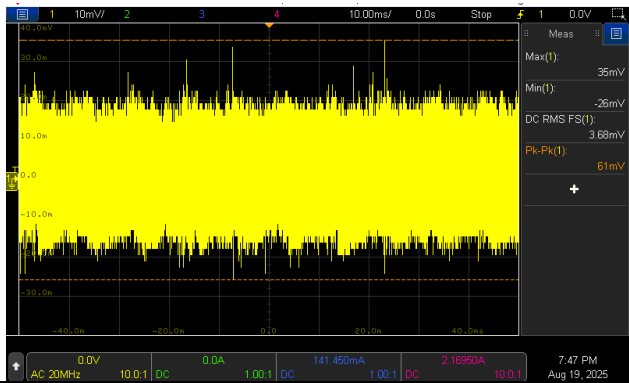
E.M.C. Test


■ RELIABILITY TEST

ENVIRONMENT TEST



DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 24V~29V	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	22.716V~30.345V/277VAC 22.715V~30.344V/230VAC 22.716V~30.344V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ +1%	I/P: 85VAC~305VAC O/P:FULL~MIN. LOAD Ta:25°C	V1: -0.0915% ~ 0.0915%
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 85VAC~ 305VAC O/P:FULL LOAD Ta:25°C	V1: -0.0042% ~ 0.0292%
4	LOAD REGULATION	V1: -1% ~ +1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.0915% ~ 0.0915%
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD / NO LOAD/ PEAK LOAD Ta:25°C	2.1%
6	RIPPLE & NOISE (Max)	V1: 100mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	40mVp-p / high frequency 61mVp-p / low frequency
high frequency :  low frequency : 				
7	SET UP TIME(Max)	230VAC/1500ms 115VAC/3000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/ 1013ms 230VAC/ 1016.6ms 115VAC/ 1067.8ms
INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage			INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage	

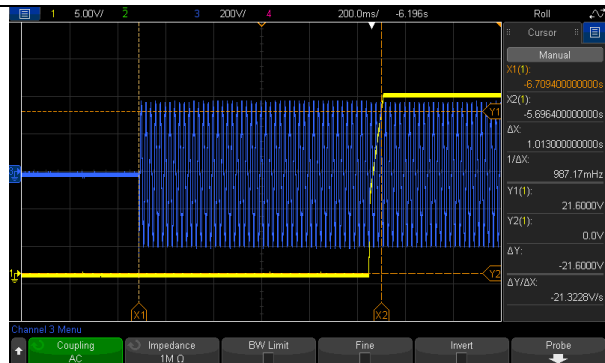

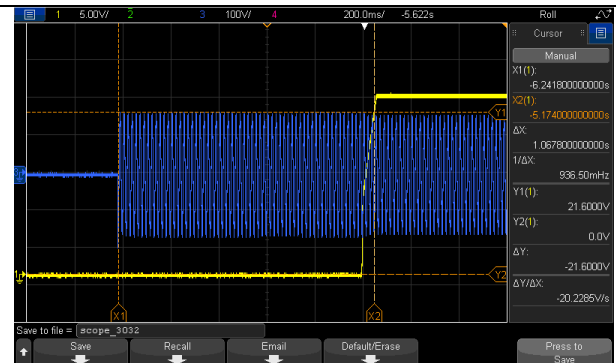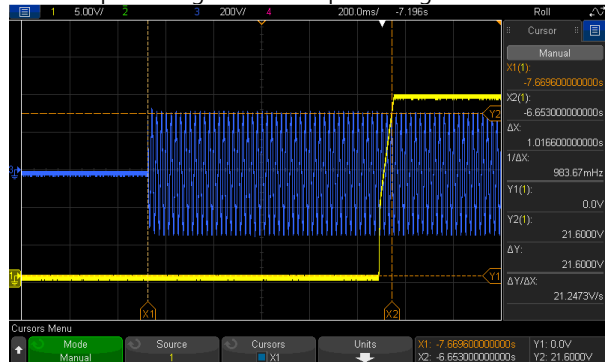INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage CH3: AC Input Voltage



INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage CH3: AC Input Voltage



INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage

INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage

INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage

INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage

INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage

INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage





INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage



INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage


INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage

8	RISE TIME (Max)	230VAC/150ms 115VAC/150ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/ 48.72ms 230VAC/ 49.38ms 115VAC/ 48.59ms
9	HOLD UP TIME (Typ.)	230VAC/ 15ms	I/P : 230 VAC	277VAC/ 33.8ms

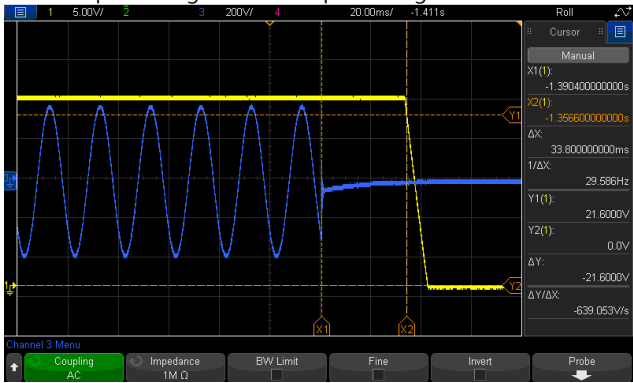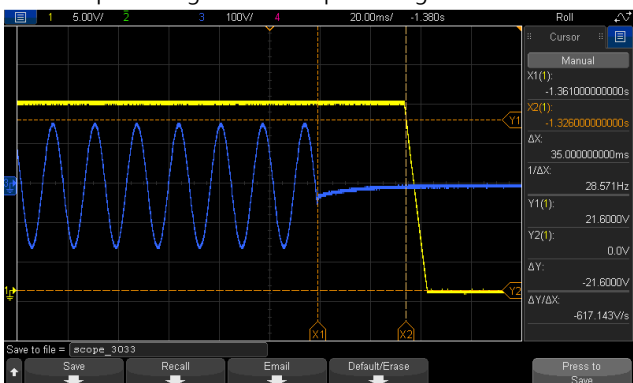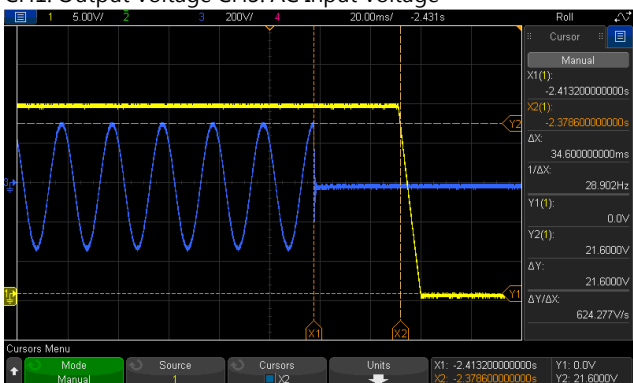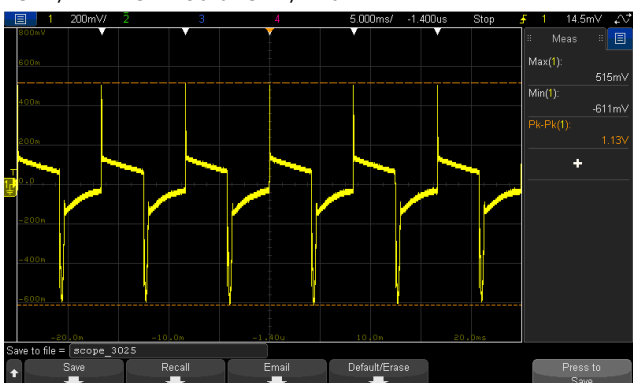		115VAC/ 15ms	I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 34.6ms 115VAC/ 35ms
	INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 	
	INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 			
10	DYNAMIC LOAD	V1: 2400mVp-p	I/P: 230VAC O/P: (1) FULL/ MIN LOAD 50%DUTY / 120HZ (2) FULL/ MIN LOAD 50%DUTY / 1KHZ Ta:25°C	1130mVp-p 1010mVp-p
	FULL / MIN LOAD 50%DUTY / 120HZ 		FULL / MIN LOAD 50%DUTY / 1KHZ 	
11	TRANSIENT RECOVERY TIME	V1: 2400mVp-p < 500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	510mVp-p


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT												
1	INPUT VOLTAGE RANGE	85VAC~305VAC 80VDC~ 431VDC 	(1) I/P: TESTING O/P: FULL / 85% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 85% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 85% LOAD Ta:25°C	(1) 81.8V~305V/ FULL LOAD 81V~305V/ 85% LOAD (2) 75.4Vdc~431Vdc/FULL LOAD 74.9Vdc~431Vdc/85% LOAD (3) 75.4Vdc~431Vdc/FULL LOAD 74.7Vdc~431Vdc/85% LOAD												
			I/P: HIGH-LINE+10V=315V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK												
		Derating 50% Load @80VDC	I/P: 80VDC O/P: 50% Load	TEST : OK												
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 85VAC~ 305VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK												
3	INPUT CURRENT (Typ.)	277V/ 4A 230V/5A 115V/ 9.5A	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =3.8775A/ 277VAC I =4.4945A/ 230VAC I =9.2522A/ 115VAC												
4	LEAKAGE CURRENT	< 3.5mA@240Vac < 4.5mA@277Vac	I/P : 240VAC/60HZ I/P : 277VAC/60HZ O/P : Min LOAD Ta : 25°C	1.4mA@240Vac 1.596mA@277Vac												
5	NO LOAD CONSUMPTION	Remote Power OFF: 1.5W@115Vac & 230Vac& 277Vac Remote Power ON: 6.7W@115Vac & 230Vac& 277Vac	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	TEST: <table><tr><td></td><td>Remote Power OFF</td><td>Remote Power ON</td></tr><tr><td>115VAC</td><td>0.866W</td><td>5.627W</td></tr><tr><td>230VAC</td><td>1.089W</td><td>3.145W</td></tr><tr><td>277VAC</td><td>1.235W</td><td>3.059W</td></tr></table>		Remote Power OFF	Remote Power ON	115VAC	0.866W	5.627W	230VAC	1.089W	3.145W	277VAC	1.235W	3.059W
	Remote Power OFF	Remote Power ON														
115VAC	0.866W	5.627W														
230VAC	1.089W	3.145W														
277VAC	1.235W	3.059W														
6	POWER FACTOR (Typ.)	0.90/ 277VAC 0.95/ 230VAC 0.98/115VAC	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9369/277VAC PF=0.9702/230VAC PF=0.9967/115VAC												
	P.F vs LOAD															

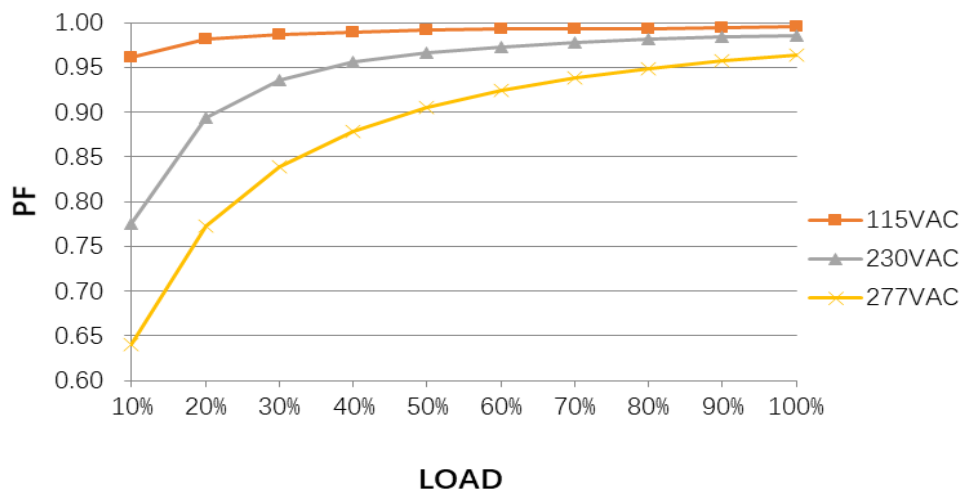

7	EFFICIENCY(Typ.)	95%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	95.46%
---	------------------	-----	---	--------

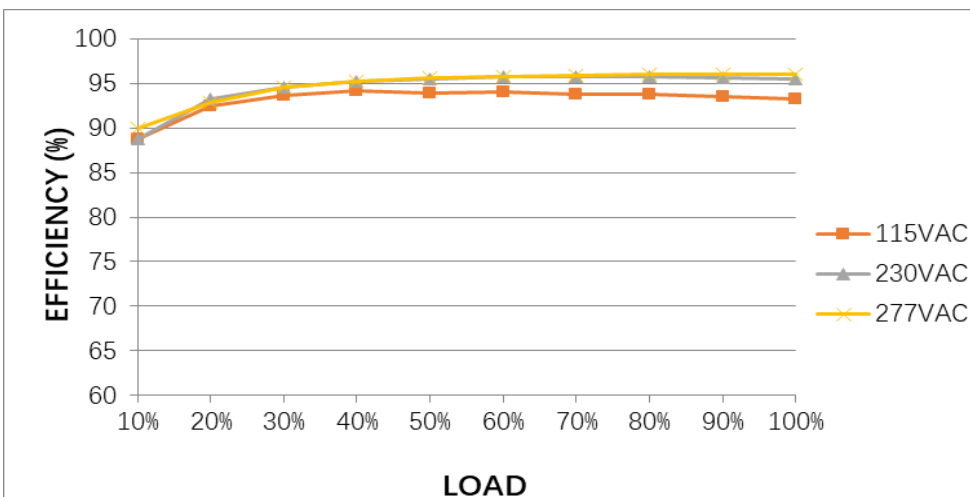
EFFICIENCY vs LOAD



8	INRUSH CURRENT(Typ.)	277V/15A 230V/10A 115V/23A COLD START	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =10.9A/ 277VAC I =9.0A/ 230VAC I =4.31A/ 115VAC T50=2670us/230V
---	----------------------	--	---	--

INPUT=277VAC/50HZ @ FULL LOAD

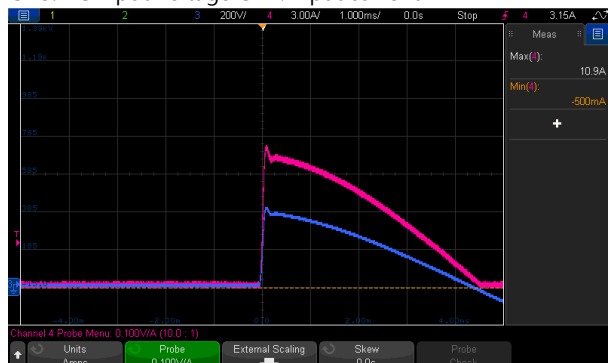CH3: AC Input Voltage CH4: Input current




INPUT=230VAC/50HZ @ FULL LOAD

CH3: AC Input Voltage CH4: Input current



INPUT=115VAC/ 60HZ @ FULL LOAD

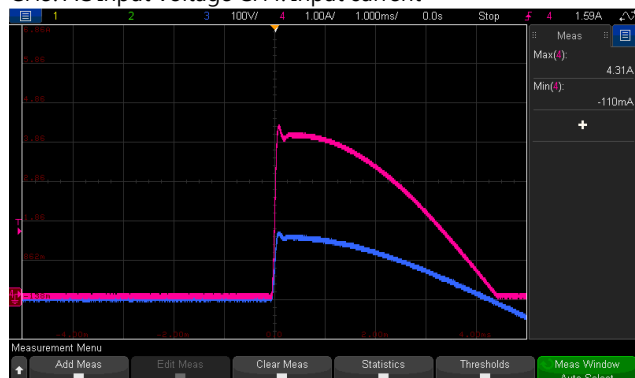CH3: AC Input Voltage CH4: Input current




T50@230VAC :





PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	Protection type: 105%~200% rated output power for more than 5 sec then constant current limiting at rate current without shutdown when $V_o=30\%\sim 100\%$ Hiccup mode when $V_o<30\%$ rated voltage	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING $T_a: 25^\circ\text{C}$	130.55%/305VAC 130.175%/230VAC 130.7%/100VAC Protection type: 105%~200% rated output power for more than 5 sec then constant current limiting at rate current without shutdown when $V_o=30\%\sim 100\%$; Hiccup mode when $V_o<30\%$ rated voltage
2	OVER VOLTAGE PROTECTION	30V~34V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 305VAC I/P: 85VAC O/P: MIN LOAD $T_a: 25^\circ\text{C}$	31.9V/ 305VAC 31.9V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode when $V_o<30\%$ rated voltage	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD	NO DAMAGE PROTECTION TYPE : Hiccup mode when $V_o<30\%$ rated voltage
5	Protection against Inverse Voltages from the Load	Prevent PSU damage from Back Electro magnetic Force during deceleration of motor or inductive load	I/P: 230VAC O/P: TESTING $T_a: 25^\circ\text{C}$	TEST : <u>OK</u>



CONTROL FUNCTION TEST

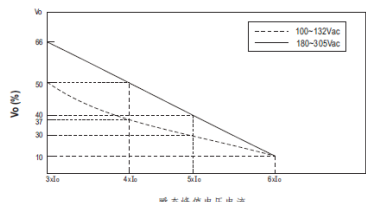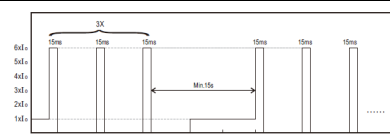NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																								
1	DC OK CONTACT RATINGS	30VDC/1A , 30VAC/0.5A RESISTIVE LOAD	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u> —																																								
2	REMOTE CONTROL	Power ON: Pin9 and Pin10 Short or keep 4~5Vdc Power OFF: Pin9 and Pin10 Open or keep<0.5Vdc	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>																																								
3	PULSE CURRENT CAPABLITY	 <table><thead><tr><th>负载</th><th>100~132Vac Vo(%)</th><th>180~305Vac Vo(%)</th><th>时间 (Max.)</th></tr></thead><tbody><tr><td>3xIo</td><td>50</td><td>66</td><td>100ms</td></tr><tr><td>4xIo</td><td>37</td><td>50</td><td>70ms</td></tr><tr><td>5xIo</td><td>30</td><td>40</td><td>40ms</td></tr><tr><td>6xIo</td><td>10</td><td>10</td><td>15ms</td></tr></tbody></table>	负载	100~132Vac Vo(%)	180~305Vac Vo(%)	时间 (Max.)	3xIo	50	66	100ms	4xIo	37	50	70ms	5xIo	30	40	40ms	6xIo	10	10	15ms	I/P:200VAC/100VAC O/P: TESTING Ta:25°C	180VAC : <table><thead><tr><th>Load</th><th>Iout_Time(ms)</th></tr></thead><tbody><tr><td>3xIo</td><td>104.8</td></tr><tr><td>4xIo</td><td>72.4</td></tr><tr><td>5xIo</td><td>41.6</td></tr><tr><td>6xIo</td><td>25.9</td></tr></tbody></table> 100VAC : <table><thead><tr><th>Load</th><th>Iout_Time(ms)</th></tr></thead><tbody><tr><td>3xIo</td><td>103.8</td></tr><tr><td>4xIo</td><td>71.8</td></tr><tr><td>5xIo</td><td>41.6</td></tr><tr><td>6xIo</td><td>26</td></tr></tbody></table>	Load	Iout_Time(ms)	3xIo	104.8	4xIo	72.4	5xIo	41.6	6xIo	25.9	Load	Iout_Time(ms)	3xIo	103.8	4xIo	71.8	5xIo	41.6	6xIo	26
负载	100~132Vac Vo(%)	180~305Vac Vo(%)	时间 (Max.)																																									
3xIo	50	66	100ms																																									
4xIo	37	50	70ms																																									
5xIo	30	40	40ms																																									
6xIo	10	10	15ms																																									
Load	Iout_Time(ms)																																											
3xIo	104.8																																											
4xIo	72.4																																											
5xIo	41.6																																											
6xIo	25.9																																											
Load	Iout_Time(ms)																																											
3xIo	103.8																																											
4xIo	71.8																																											
5xIo	41.6																																											
6xIo	26																																											
4	PULSE CURRENT CAPABLITY		I/P:230VAC O/P:TESTING Ta:25°C	TEST : <u>OK</u>																																								
5	LED Status Indictors	LED : <table><thead><tr><th>Description</th><th>Output of alarm</th></tr></thead><tbody><tr><td>Restore Factory Settings</td><td>Green : 3 Blinks/ Pause </td></tr><tr><td>DC OK</td><td>Green </td></tr><tr><td>DC Fail</td><td>Red </td></tr><tr><td>Overload (115Vac : +150% rated current) (230Vac : +200% rated current)</td><td>Red : 1 Blink/ Pause </td></tr><tr><td>Over voltage</td><td>Red : 2 Blinks/ Pause </td></tr><tr><td>Over temperature</td><td>Red : 3 Blinks/ Pause </td></tr><tr><td>Against Inverse Voltages From The Load</td><td>Red : 4 Blinks/ Pause </td></tr><tr><td>High Ambient Temperature Warning</td><td>Red : Blink </td></tr><tr><td>Others (None)</td><td>Red : 5 Blinks/ Pause </td></tr></tbody></table>	Description	Output of alarm	Restore Factory Settings	Green : 3 Blinks/ Pause 	DC OK	Green 	DC Fail	Red 	Overload (115Vac : +150% rated current) (230Vac : +200% rated current)	Red : 1 Blink/ Pause 	Over voltage	Red : 2 Blinks/ Pause 	Over temperature	Red : 3 Blinks/ Pause 	Against Inverse Voltages From The Load	Red : 4 Blinks/ Pause 	High Ambient Temperature Warning	Red : Blink 	Others (None)	Red : 5 Blinks/ Pause 	I/P:230VA0C O/P:FULL LOAD Ta:25°C	TEST : <u>OK</u>																				
Description	Output of alarm																																											
Restore Factory Settings	Green : 3 Blinks/ Pause 																																											
DC OK	Green 																																											
DC Fail	Red 																																											
Overload (115Vac : +150% rated current) (230Vac : +200% rated current)	Red : 1 Blink/ Pause 																																											
Over voltage	Red : 2 Blinks/ Pause 																																											
Over temperature	Red : 3 Blinks/ Pause 																																											
Against Inverse Voltages From The Load	Red : 4 Blinks/ Pause 																																											
High Ambient Temperature Warning	Red : Blink 																																											
Others (None)	Red : 5 Blinks/ Pause 																																											

6	PARALLEL	Up to 3840W (3+1), please refer to Function Manual for more details	I/P: TESTING O/P: TESTING LOAD Ta:25°C	TEST : <u>OK</u>
7	PEAK Power	I/P: 100/200VAC O/P: -----100VAC ———200VAC		TEST : <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5/Q6 : Rated: 90A/650V	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	Q5 VDS: (1) 563V (2) 555V (3) 567V (4) 563V (5) 563V (6) 567V (7) 559V (8) 559V	Q6 VDS: (1) 575V (2) 571V (3) 575V (4) 575V (5) 575V (6) 575V (7) 567V (8) 571V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1/Q2 : Rated: 68A/600V	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	Q1 VDS: (1) 495V (2) 487V (3) 503V (4) 483V (5) 487V (6) 491V (7) 495V (8) 503V	Q2 VDS: (1) 495V (2) 451V (3) 475V (4) 459V (5) 463V (6) 459V (7) 483V (8) 479V

3	P.F.C DIODE	D8/D9 : Rated: 10A/650V	I/P: High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	D8 : (1) 537V (2) 541V (3) 541V (4) 541V (5) 545V	D9 : (1) 501V (2) 501V (3) 501V (4) 501V (5) 509V
4	Diode Peak Voltage	Q100 / Q104 : Rated: 16A/100V	AC ON/OFF I/P: High-Line +3V =308 V <u>VO=Vomax</u> O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load <u>VO=Vonormal</u> O/P: (1) Full Load Ta:25°C	Q100: <u>VO=Vomax</u> VDS: (1) 72.5V (2) 72.5V (3) 73.1V (4) 73.7V (5) 73.1V (6) 73.1V (7) 73.7V (8) 69.5V (9) 74.3V <u>VO=Vonormal</u> (1) 67.1V	Q104: <u>VO=Vomax</u> VDS: (1) 74.3V (2) 71.9V (3) 73.1V (4) 73.1V (5) 72.5V (6) 74.3V (7) 71.3V (8) 76.7V (9) 76.1V <u>VO=Vonormal</u> (1) 67.7V
5	AUX Transistor (D to S) or (C to E) Peak Voltage	U2 : Rated: 725V/654mA	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	VDS: (1) 554V (2) 550V (3) 554V (4) 554V (5) 558V (6) 558V (7) 550V (8) 558V	
6	AUX Clamp Diode Peak Voltage	D 19: Rated: 1A/ 650V	AC ON/OFF I/P : High-Line +3V = 308V O/P : (1) Dynamic Load	(1) 572V (2) 518V	

			90%Duty/1KHz (2) Full load continue Ta : 25°C	
7	AUX Diode Peak Voltage	D200 : Rated : 1A/600V D22 : Rated : 3A/200V	AC ON/OFF I/P: High-Line +3V =308 V O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load Ta:25°C	D200: D22: (1) 113V (1) 142V (2) 112V (2) 142V (3) 113V (3) 139V (4) 113V (4) 135V (5) 113V (5) 139V (6) 114V (6) 136V (7) 114V (7) 136V (8) 111V (8) 133V (9) 113V (9) 142V
8	Input Capacitor Voltage	C5 : Rated: 220μ /450V	I/P: High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue (5) Peak Load on/off (6) Peak Load continue Ta:25°C	(1) 445V (2) 441V (3) 433V (4) 433V (5) 433V (6) 441V
9	Control IC Voltage Test	PWM IC U1 : Rated : 12.5V~ 27.9V PFC IC U5 : Rated : 11.6V~ 21V O/P IC U101: Rated: 4.75V~38V IC U404 : Rated : 3V~36V AUX IC U2 : Rated : 5.65V~6.8V MCU IC U9 : Rated : 2V~3.6V Level: 3.2835~3.3165V MCU IC U306: Rated : 2.4V~ 3.6V Level: 3.2835~3.3165V	AC ON/OFF I/P: High-Line +3V =308V O/P: (1) Full Load (2) Output Short (3) O.L.P (4) O.V.P. (5) No Load VR min (Low Line) Ta:25°C	U1: U2 (1) 15.9V (1) 6.49V (2) 15.7V (2) 6.73V (3) 15.7V (3) 6.69V (4) 15.6V (4) 6.45V (5) 15.7V (5) 6.49V U5 U9 (1) 15.1V (1) 3.33V (2) 15.1V (2) 3.32V (3) 15.1V (3) 3.33V (4) 15V (4) 3.32V (5) 14.9V (5) 3.32V U101 U306 (1) 11.5V (1) 3.33V (2) 11.5V (2) 3.33V (3) 11.5V (3) 3.33V (4) 11.5V (4) 3.33V (5) 11.5V (5) 3.33V

				U404 (1) 5.15V (2) 5.55V (3) 5.35V (4) 5.15V (5) 5.11V
--	--	--	--	---

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4 KVAC/min I/P-FG : 2 KVAC/min O/P-FG:1.5 KVAC/min O/P-DC OK: 0.5 KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min O/P-DC OK: 0.6 KVAC/min Ta:25°C	I/P-O/P: 6.1 mA I/P-FG: 7.05 mA O/P-FG: 4.54 mA O/P-DC OK: 0.006 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P: 50 GΩ I/P-FG: 50 GΩ O/P-FG: 50 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100mΩ	40A /2min Ta:25°C	12 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032 (CISPR32) BS EN/EN61204-3 CNS15936 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032 (CISPR32) BS EN/EN61204-3 CNS15936 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN 61000-4-2 AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	BS EN/EN 61000-4-4 INPUT : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

6	SURGE	BS E /EN 61000-4-5 L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																																								
1	TEMPERATURE RISE TEST	MODEL : XDR-960-24 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=25.4°C 2. HIGH AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=59.7°C																																																																																																																										
		<table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta=25.4°C</th><th>HIGH AMBIENT Ta=59.7°C</th></tr><tr><td>1</td><td>C5</td><td>49.0°C</td><td>83.4°C</td></tr><tr><td>3</td><td>C8</td><td>50.5°C</td><td>85.0°C</td></tr><tr><td>4</td><td>RTH5</td><td>66.4°C</td><td>100.9°C</td></tr><tr><td>5</td><td>U5</td><td>59.6°C</td><td>94.5°C</td></tr><tr><td>6</td><td>U7</td><td>56.8°C</td><td>90.6°C</td></tr><tr><td>7</td><td>D10</td><td>64.8°C</td><td>98.1°C</td></tr><tr><td>8</td><td>C1</td><td>50.2°C</td><td>85.7°C</td></tr><tr><td>9</td><td>RTH3</td><td>62.5°C</td><td>95.9°C</td></tr><tr><td>10</td><td>D8</td><td>66.7°C</td><td>100.2°C</td></tr><tr><td>11</td><td>LF3</td><td>57.4°C</td><td>92.0°C</td></tr><tr><td>12</td><td>C53</td><td>50.9°C</td><td>84.6°C</td></tr><tr><td>13</td><td>C202</td><td>53.9°C</td><td>87.5°C</td></tr><tr><td>14</td><td>U307</td><td>59.7°C</td><td>93.9°C</td></tr><tr><td>15</td><td>C922</td><td>48.8°C</td><td>84.5°C</td></tr><tr><td>16</td><td>U11</td><td>66.3°C</td><td>100.5°C</td></tr><tr><td>17</td><td>U1</td><td>59.0°C</td><td>94.3°C</td></tr><tr><td>18</td><td>Q10</td><td>57.6°C</td><td>92.8°C</td></tr><tr><td>19</td><td>L6</td><td>46.9°C</td><td>81.4°C</td></tr><tr><td>20</td><td>ZNR1</td><td>51.1°C</td><td>86.0°C</td></tr><tr><td>21</td><td>LF1</td><td>54.1°C</td><td>89.1°C</td></tr><tr><td>22</td><td>C103</td><td>58.1°C</td><td>92.6°C</td></tr><tr><td>23</td><td>LF100</td><td>67.0°C</td><td>102.7°C</td></tr><tr><td>24</td><td>Q110</td><td>67.2°C</td><td>102.8°C</td></tr><tr><td>25</td><td>BD2</td><td>58.1°C</td><td>91.1°C</td></tr><tr><td>26</td><td>BD1</td><td>57.7°C</td><td>90.7°C</td></tr><tr><td>27</td><td>L7</td><td>64.1°C</td><td>98.0°C</td></tr><tr><td>28</td><td>T2</td><td>54.5°C</td><td>89.0°C</td></tr><tr><td>29</td><td>C52</td><td>56.3°C</td><td>90.9°C</td></tr><tr><td>30</td><td>Q5</td><td>61.5°C</td><td>96.3°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta=25.4°C	HIGH AMBIENT Ta=59.7°C	1	C5	49.0°C	83.4°C	3	C8	50.5°C	85.0°C	4	RTH5	66.4°C	100.9°C	5	U5	59.6°C	94.5°C	6	U7	56.8°C	90.6°C	7	D10	64.8°C	98.1°C	8	C1	50.2°C	85.7°C	9	RTH3	62.5°C	95.9°C	10	D8	66.7°C	100.2°C	11	LF3	57.4°C	92.0°C	12	C53	50.9°C	84.6°C	13	C202	53.9°C	87.5°C	14	U307	59.7°C	93.9°C	15	C922	48.8°C	84.5°C	16	U11	66.3°C	100.5°C	17	U1	59.0°C	94.3°C	18	Q10	57.6°C	92.8°C	19	L6	46.9°C	81.4°C	20	ZNR1	51.1°C	86.0°C	21	LF1	54.1°C	89.1°C	22	C103	58.1°C	92.6°C	23	LF100	67.0°C	102.7°C	24	Q110	67.2°C	102.8°C	25	BD2	58.1°C	91.1°C	26	BD1	57.7°C	90.7°C	27	L7	64.1°C	98.0°C	28	T2	54.5°C	89.0°C	29	C52	56.3°C	90.9°C	30	Q5	61.5°C	96.3°C
NO	Position	ROOM AMBIENT Ta=25.4°C	HIGH AMBIENT Ta=59.7°C																																																																																																																									
1	C5	49.0°C	83.4°C																																																																																																																									
3	C8	50.5°C	85.0°C																																																																																																																									
4	RTH5	66.4°C	100.9°C																																																																																																																									
5	U5	59.6°C	94.5°C																																																																																																																									
6	U7	56.8°C	90.6°C																																																																																																																									
7	D10	64.8°C	98.1°C																																																																																																																									
8	C1	50.2°C	85.7°C																																																																																																																									
9	RTH3	62.5°C	95.9°C																																																																																																																									
10	D8	66.7°C	100.2°C																																																																																																																									
11	LF3	57.4°C	92.0°C																																																																																																																									
12	C53	50.9°C	84.6°C																																																																																																																									
13	C202	53.9°C	87.5°C																																																																																																																									
14	U307	59.7°C	93.9°C																																																																																																																									
15	C922	48.8°C	84.5°C																																																																																																																									
16	U11	66.3°C	100.5°C																																																																																																																									
17	U1	59.0°C	94.3°C																																																																																																																									
18	Q10	57.6°C	92.8°C																																																																																																																									
19	L6	46.9°C	81.4°C																																																																																																																									
20	ZNR1	51.1°C	86.0°C																																																																																																																									
21	LF1	54.1°C	89.1°C																																																																																																																									
22	C103	58.1°C	92.6°C																																																																																																																									
23	LF100	67.0°C	102.7°C																																																																																																																									
24	Q110	67.2°C	102.8°C																																																																																																																									
25	BD2	58.1°C	91.1°C																																																																																																																									
26	BD1	57.7°C	90.7°C																																																																																																																									
27	L7	64.1°C	98.0°C																																																																																																																									
28	T2	54.5°C	89.0°C																																																																																																																									
29	C52	56.3°C	90.9°C																																																																																																																									
30	Q5	61.5°C	96.3°C																																																																																																																									

				NO	Position	ROOM AMBIENT Ta=25.4°C	HIGH AMBIENT Ta=59.7°C
				31	Q6	59.6°C	94.7°C
				32	T1coil	80.4°C	115.5°C
				33	T1core	75.4°C	104.7°C
				34	T3	57.6°C	93.1°C
				35	Q1	63.2°C	97.8°C
				36	T4	55.2°C	90.7°C
				37	Q2	61.3°C	96.6°C
				38	C11	54.5°C	89.7°C
				39	L2	67.4°C	101.0°C
				40	U9	52.8°C	84.2°C
				41	L1	67.7°C	100.6°C
				42	Q101	71.9°C	107.0°C
				43	Q105	70.3°C	104.4°C
				44	Q106	74.0°C	109.3°C
				45	U102	72.1°C	106.7°C
				46	Q102	72.7°C	107.5°C
				47	U306	59.0°C	92.9°C
				48	U400	58.2°C	92.0°C
				49	J101	68.2°C	102.7°C
				50	U401	64.3°C	98.5°C
				51	D22	66.3°C	99.9°C
				52	Q23	66.8°C	100.1°C
				53	Q201	61.8°C	96.0°C
				54	D17	59.4°C	94.6°C
				55	R25	58.2°C	92.6°C
				56	C108	66.3°C	100.4°C
				57	C105	60.3°C	95.0°C
				58	Q111	66.0°C	101.9°C
				59	RG6	62.0°C	96.0°C
				60	C107	66.6°C	101.1°C
				61	D9	64.3°C	98.1°C
				62	U404	55.2°C	89.7°C
				63	L5	52.1°C	87.5°C
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 125%LOAD Ta : 25°C	TEST : OK			
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 80%/100 %LOAD Ta= -45°C/-35°C	TEST : OK			
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C/95 %R.H NO DAMAGE	I/P : 315VAC O/P : FULL LOAD Ta= 60°C HUMIDITY= 95 %R.H	TEST : OK			
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C(0~60°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.008%/°C(0~60°C)			

6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC
7	THERMAL SHOCK TEST	-30~60°C	1. Thermal shock Temperature : -35°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C109 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60°C LIFE TIME	(1) 395169 HRS (2) 34447 HRS (3) 71279 HRS (4) 137268 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 819.6K hrs min. Telcordia SR-332 (Bellcore) ; 113.3K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Hanxr	Liutt	Wangzd

2020.10.1 TAG-QA-009